
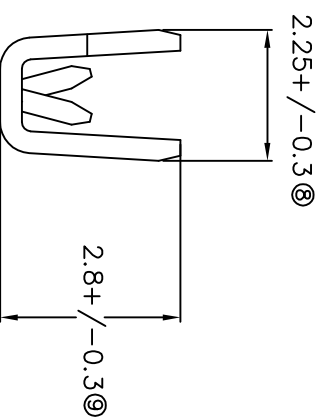
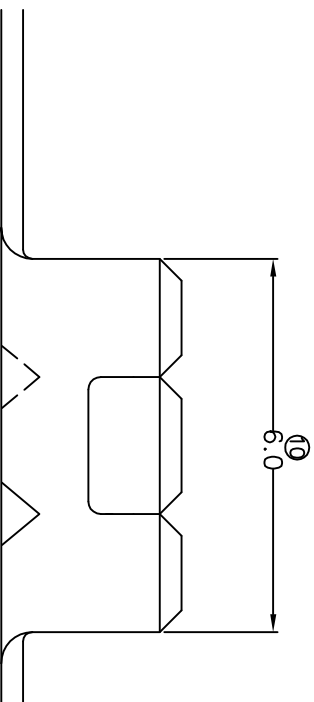


# TERMINALS SPECIFICATION DRAWING

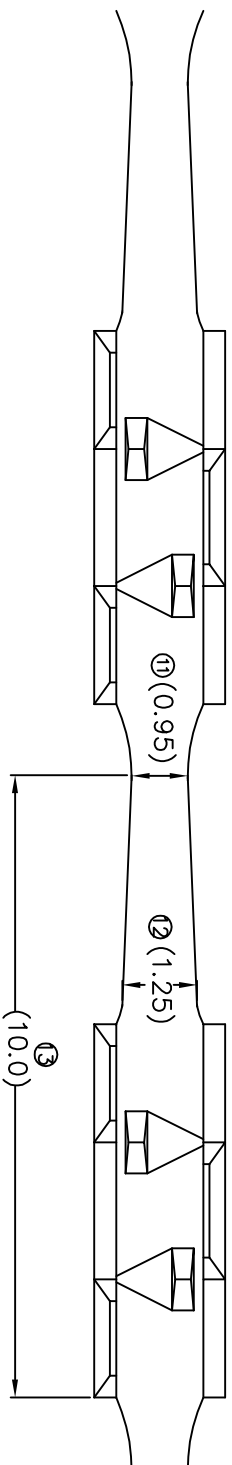

FOR REFERENCE ONLY

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TO +120°C.
- 5) VOLTAGE-MAX [VDLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40 μ INCH.
- 3) PACKING QTY : 30000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 0.95MM.
- 1) APPLICABLE WIRE RANGE : #AWG 26/1061

SPECIFICATION :

<b>MATERIAL:</b> t0.35 BRASS C2680	<b>TIN PLATING</b>	12012A-2
<b>DIMENSIONS :</b> MM	<b>TREATMENT</b> SELECTIVE	12012A-1
<b>TOLERANCE UNLESS OTHERWISE SPECIFIED:</b>	<b>CHK:</b> SC CHOO	<b>PART NUMBER</b>
X.XXX +/-0.05	<b>DWN:</b> KS YEW	<b>EPI</b> Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.
X.XX +/-0.10	<b>CHK:</b> Y L	
X.X +/-0.20	<b>APVD:</b> CHUANG	<b>PART NAME:</b>
X +/-0.50	<b>SCALE :</b> FREE	SPLICE TERMINALS
	<b>DRAWING NO:</b>	APPLICABLE (1) TERMINALS (2) HOUSING
<b>EFFECTIVE DATE :</b> 4/5/07	<b>A1311</b>	(1) - (2) -
<b>SHEET OF :</b> 1 / 1		