
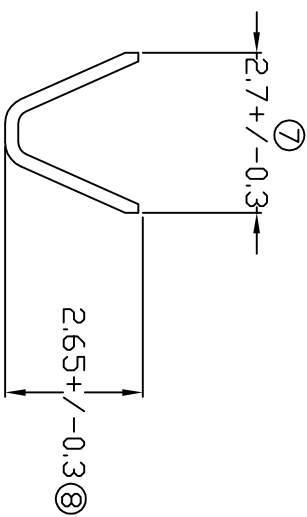


# TERMINALS SPECIFICATION DRAWING

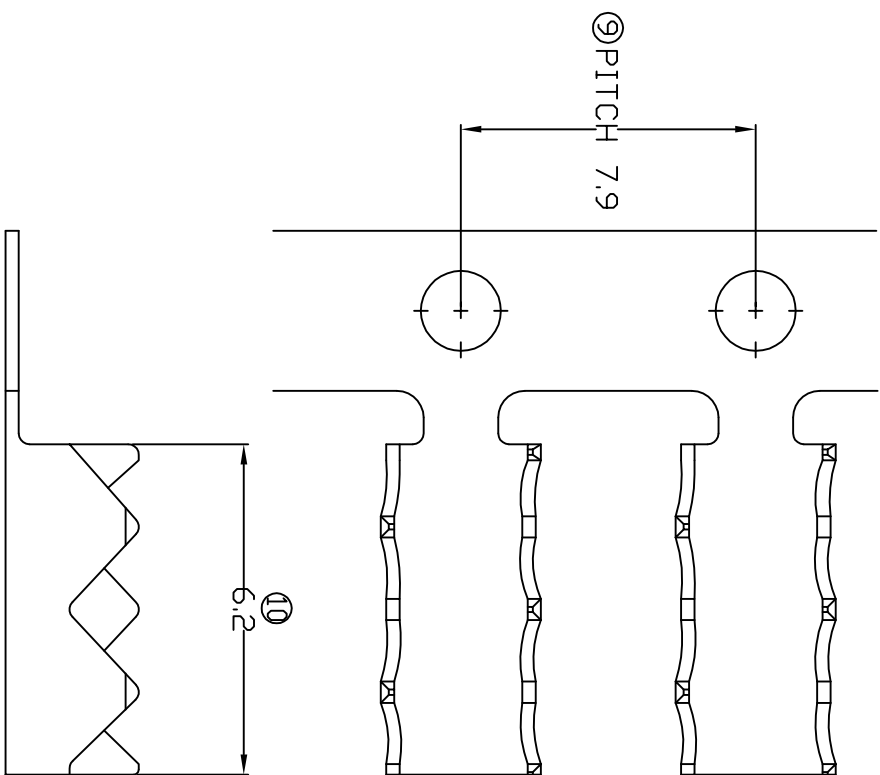

FOR REFERENCE ONLY

- 6) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 5) TEMPERATURE RANGE: -40°C TD +120°C.
- 4) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 3) PACKING QTY : 10000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : - MM.
- 1) APPLICABLE WIRE RANGE : 0.66-0.29MM<sup>2</sup>.

SPECIFICATION :

<b>MATERIAL:</b> t0.25 BRASS C2680		<b>TREATMENT SELECTIVE</b> NONE		<b>PART NUMBER</b> 12027-1	
<b>DIMENSIONS : MM</b> TOLERANCE UNLESS OTHERWISE SPECIFIED: X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50		<b>DWN: KS YE W</b> CHK: SC CHOO APVD: CHUANG SCALE : FREE DRAWING NO:		<b>PART NAME:</b> EPI Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd. <b>SPLICE TERMINALS</b> APPLICABLE (1) TERMINALS (2) HOUSING	
<b>EFFECTIVE DATE :</b> 11/7/07		<b>A1312</b>		(1) - (2) -	
<b>REVISION:</b> 04				SHEET OF : 1 / 1	