


SPECIFICATION DRAWING

MASTER COPY

| ITEM NO | MATERIAL | TREATMENT | QTY/REEL | REEL/CARTON | MATCHING PART(S) |
|----------|---------------------|-------------|----------|-------------|------------------|
| 1219HA-1 | t0.35 BRASS (C2680) | NONE | 6000 PCS | 4 | TERMINAL-N/A |
| 1219HA-2 | t0.35 BRASS (C2680) | TIN PLATING | 6000 PCS | 4 | HOUSING-N/A |

| SYMBOL | DESCRIPTION |
|--------|--|
| ○ | DIMENSION INSPECTED DURING SETUP AND OUTGOING. |
| □ | DIMENSION INSPECTED HOURLY. |
| SPC | STATISTICALLY CONTROLLED DIMENSION. |
| △ | JIG USED DURING INSPECTION. |

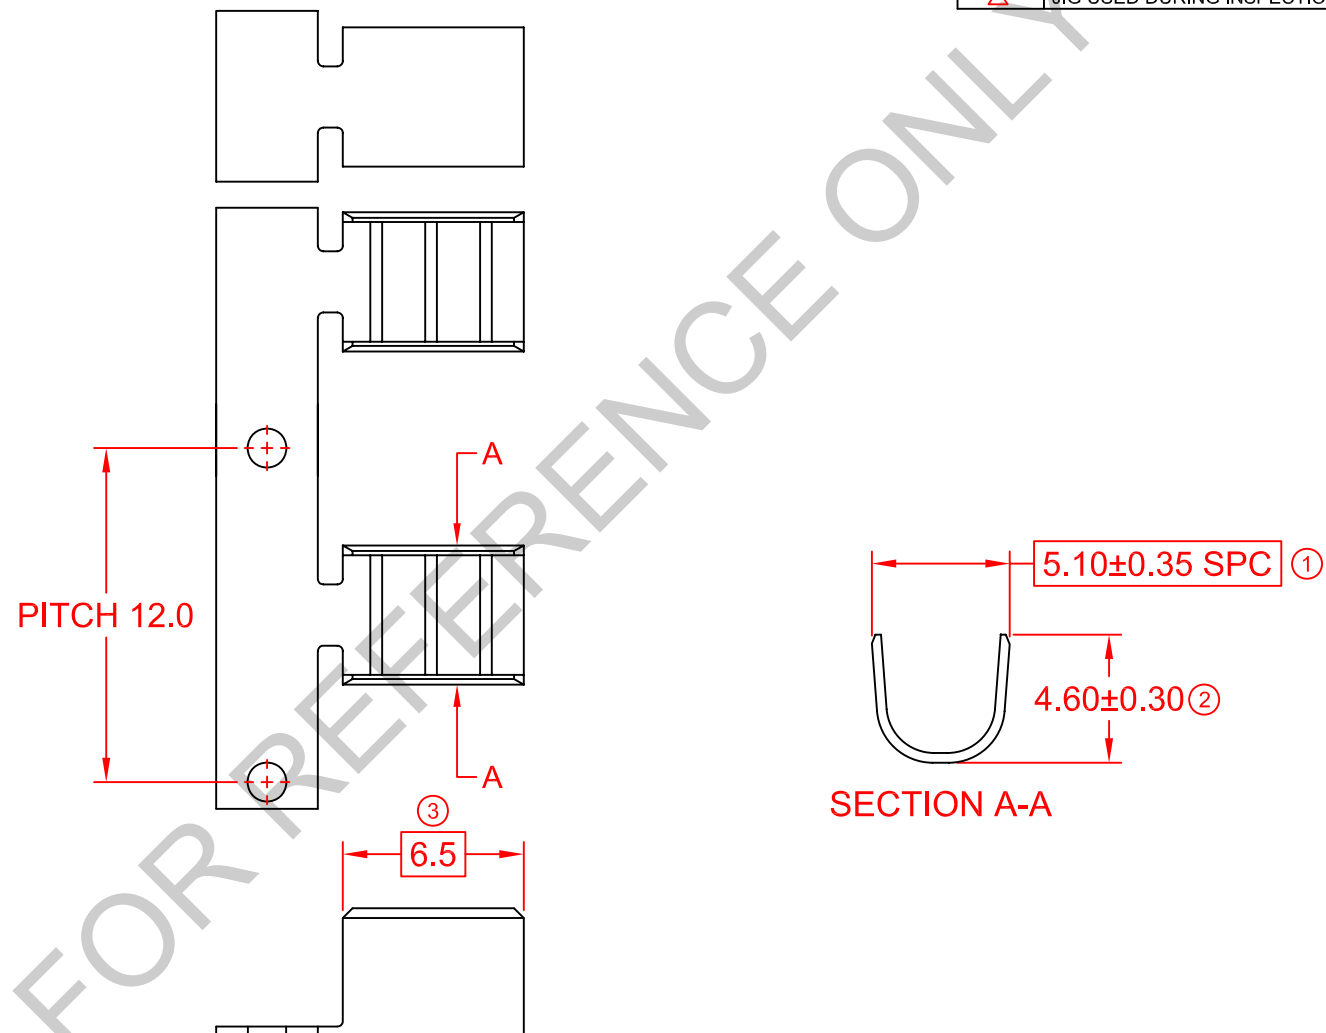

REMARKS:

- a) PLATING THICKNESS MIN 40μ INCH
- b) SUGGESTED WIRE INSULATION (O.D): - MM
- c) SUGGESTED WIRE RANGE: 2.15~0.95MM² (AWG12~14)

| | | | | | | | |
|------|----------|----------------------|---------|--------------------|---|---------------------------|--------------------------------------|
| | | | | REVISION: 06 | GENERAL TOLERANCE UNLESS SPECIFIED: X.XXX ±0.05 X.XX ±0.10 X.X ±0.20 X ±0.50 | PREPARE BY: KS YEW | Elamp Precision Industry(M) Sdn.Bhd. |
| | | | | | | REVIEWED BY: CH ANG | |
| | | | | SHEET OF: 1 / 1 | EFFECTIVE DATE: 25/11/11 | APPROVED BY: CY CHUANG | ITEM NO: 1219HA-1, 2 |
| 06 | 25/11/11 | UPDATE TO NEW FORMAT | - | | | SCALE : FREE | DRAWING NO: EP-Q-8A |
| REV. | DATE | AMENDMENT | ECR NO: | | | UNIT : MM | |