

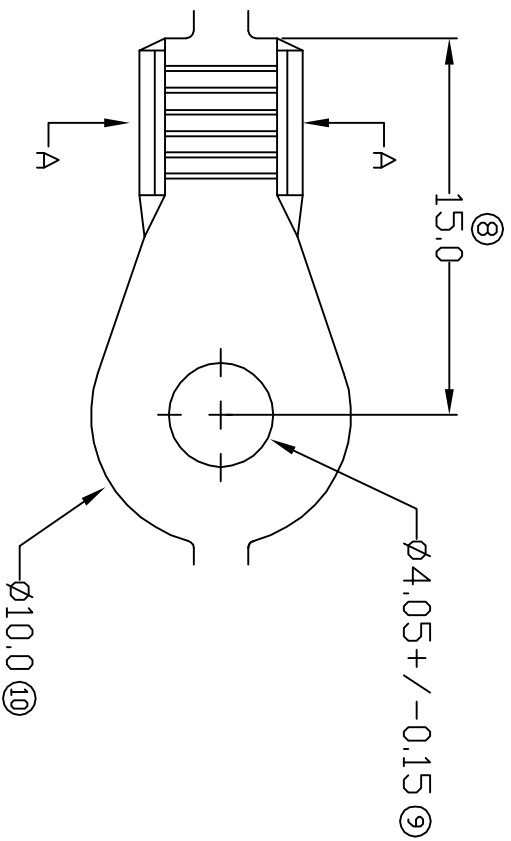


# TERMINALS SPECIFICATION DRAWING

UNCONTROLLED COPY

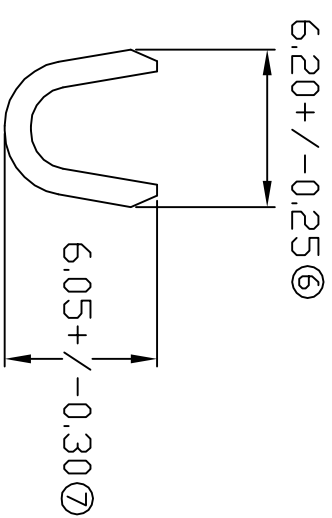

(Length does not include knock off tabs.)

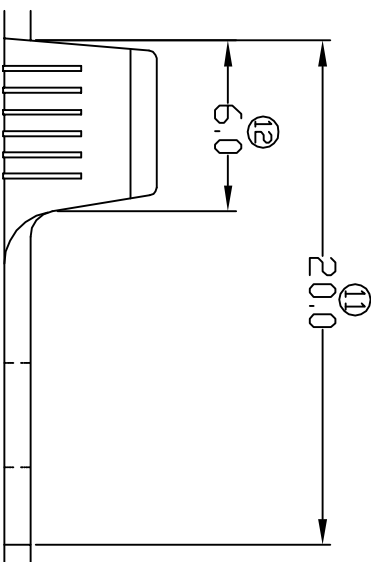

- 5) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 4) TEMPERATURE RANGE -40°C TO +120°C.
- 3) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 2) THICKNESS PLATING MORE THAN 40µ INCH.
- 1) PACKING QTY : 3500 PCS/REEL.

SPECIFICATION :

FOR REFERENCE ONLY

REVISION:  
04



	MATERIAL: t1.00 BRASS C2680		
	DIMENSIONS : MM	DWN: KS YEW	TIN PLATING
	TOLERANCE UNLESS OTHERWISE SPECIFIED:	CHK: C.Y	TREATMENT SELECTIVE
	X.XXX +/-0.05	APVD: CHUANG	141040-2
	X.XX +/-0.10	SCALE : FREE	PART NUMBER
	X.X +/-0.20	DRAWING NO: A1369	
	X +/-0.50	EFFECTIVE DATE : 11/8/08	
04	11/8/08	SPECIFICATION: 1 & 2 DELETED	
REV.	DATE	AMENDMENT	

**EPI** Terminals & Connectors  
Eiamp Precision Industry(M) Sdn.Bhd.

PART NAME:  
RING TONGUE TERMINALS  
APPLICABLE (1) TERMINALS (2) HOUSING

(1) -  
(2) -