
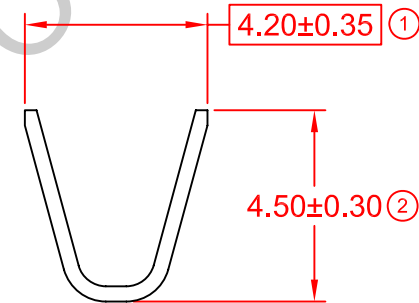
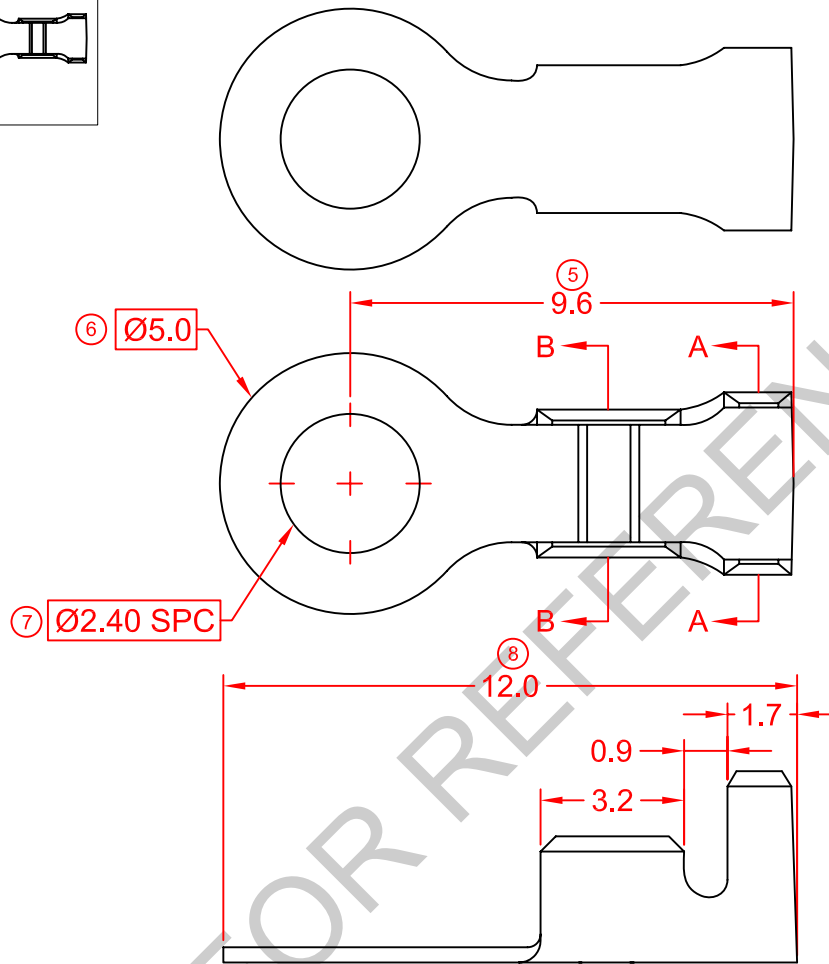


# SPECIFICATION DRAWING


MASTER COPY

ITEM NO	MATERIAL	TREATMENT	QTY/REEL	REEL/CARTON	MATCHING PART(S)
14524A-1	t0.4 BRASS (C2680)	NONE	10000 PCS	4	TERMINAL-N/A
14524A-2	t0.4 BRASS (C2680)	TIN PLATING	10000 PCS	4	HOUSING-N/A

SYMBOL	DESCRIPTION
○	DIMENSION INSPECTED DURING SETUP AND OUTGOING.
□	DIMENSION INSPECTED HOURLY.
SPC	STATISTICALLY CONTROLLED DIMENSION.
△	JIG USED DURING INSPECTION.

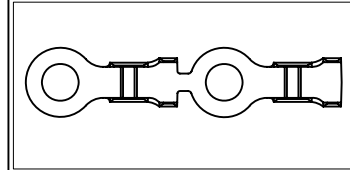

SECTION A-A

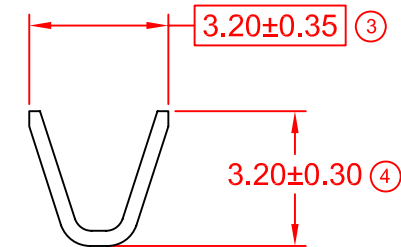

SECTION B-B

**REMARKS:**

- a) PLATING THICKNESS MIN 40μ INCH
- b) SUGGESTED WIRE INSULATION (O.D): 2.6MM
- c) SUGGESTED WIRE RANGE: 1.22~0.62MM<sup>2</sup> (AWG16~18)

				REVISION: 05	GENERAL TOLERANCE UNLESS SPECIFIED: X.XXX ±0.05 X.XX ±0.10 X.X ±0.20 X ±0.50	PREPARE BY: KS YEW	Elamp Precision Industry(M) Sdn.Bhd.
						REVIEWED BY: CH ANG	
					APPROVED BY: CY CHUANG	ITEM NO: 14524A-1, 2	
05	3/2/12	UPDATE TO NEW FORMAT	-	SHEET OF: 1 / 1	EFFECTIVE DATE: 3/2/12	SCALE : FREE	DRAWING NO: EP-Q-146A
REV.	DATE	AMENDMENT	ECR NO:				