

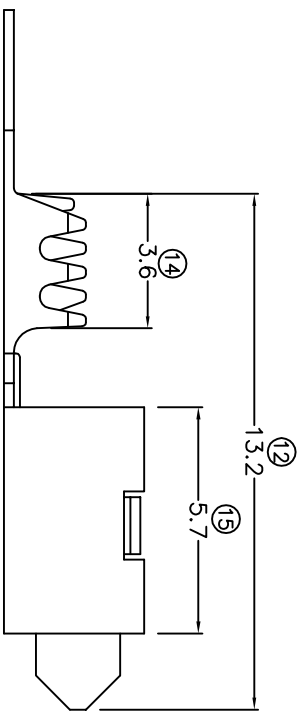



TERMINALS SPECIFICATION DRAWING

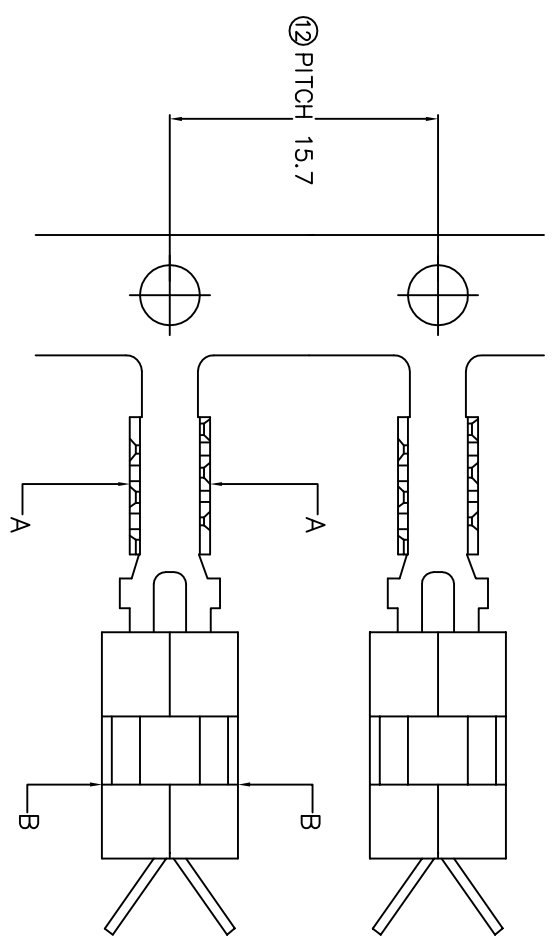

FOR REFERENCE ONLY

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TD +120°C.
- 5) VDLTAGE-MAX [VDLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 4000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 0.95MM.
- 1) APPLICABLE WIRE RANGE : #AWG 26/1061.

SPECIFICATION :

MATERIAL: t0.25 BRASS C2680	PRE-TIN PLATED TIN PLATED	16004A-2T	
DIMENSIONS : MM	TREATMENT SELECTIVE	PART NUMBER	
TOLERANCE UNLESS OTHERWISE SPECIFIED:	DWN: KS YEW	16004A-1	
X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50	CHK: SC CHOO APVD: CHUANG SCALE : FREE DRAWING NO:	16004A-2 16004A-1	
EFFECTIVE DATE : 23/8/07	APPLICABLE (1) TERMINALS (2) HOUSING	(1) -	(2) 16004H4
SHEET OF : 1 / 1	REVISION: 02	APPLICABLE (1) TERMINALS (2) HOUSING	

EPI Terminals & Connectors
Eiamp Precision Industry(M) Sdn.Bhd.