


SPECIFICATION DRAWING

MASTER COPY

ITEM NO	MATERIAL	TREATMENT	QTY/REEL	REEL/CARTON	MATCHING PART(S)
170402KM-2T	t0.25 PBR (C5191)	PRE-TIN PLATED	5000 PCS	6	TERMINAL-270402M HOUSING-040 SERIES HOUSING

SYMBOL	DESCRIPTION
○	DIMENSION INSPECTED DURING SETUP AND OUTGOING.
□	DIMENSION INSPECTED HOURLY.
SPC	STATISTICALLY CONTROLLED DIMENSION.
△	JIG USED DURING INSPECTION.

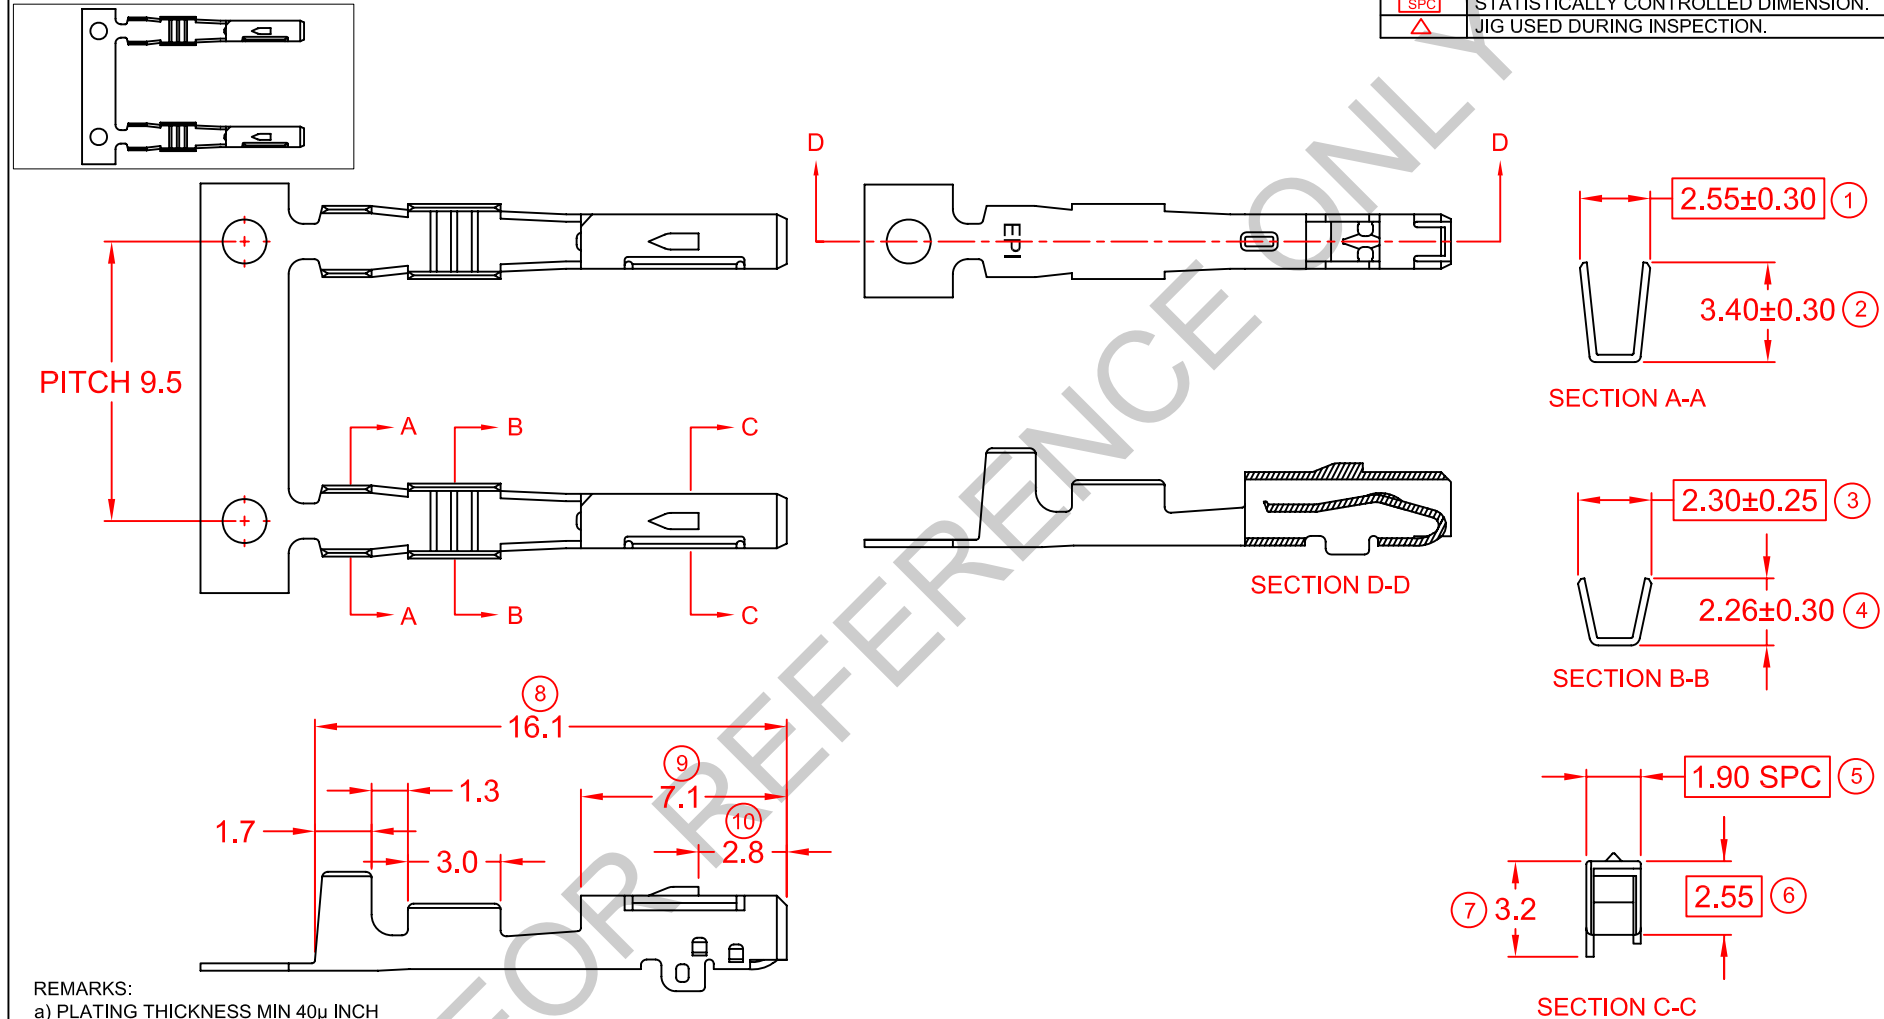

REMARKS:

- a) PLATING THICKNESS MIN 40μ INCH
- b) SUGGESTED WIRE INSULATION (O.D): 1.8MM
- c) SUGGESTED WIRE RANGE: 0.45-0.20MM² (AWG18-22)
- d) INSERT FORCE: MAX 0.30KG
- e) TENSILE FORCE: MIN 0.20KG

				REVISION: 02	GENERAL TOLERANCE UNLESS SPECIFIED: X.XXX ±0.05 X.XX ±0.10 X.X ±0.20 X ±0.50	PREPARE BY: KS YEW	EP Elamp Precision Industry(M) Sdn.Bhd.
				⊕		REVIEWED BY: CH ANG	
						APPROVED BY: CY CHUANG	ITEM NAME: 040 SERIES FEMALE TERMINAL
02	2/11/11	UPDATE TO NEW FORMAT	-	SHEET OF: 1 / 1	EFFECTIVE DATE: 2/11/11	SCALE : FREE UNIT : MM	ITEM NO: 170402KM-2T
REV.	DATE	AMENDMENT	ECR NO:				DRAWING NO: EP-Q-335A