


TERMINALS SPECIFICATION DRAWING

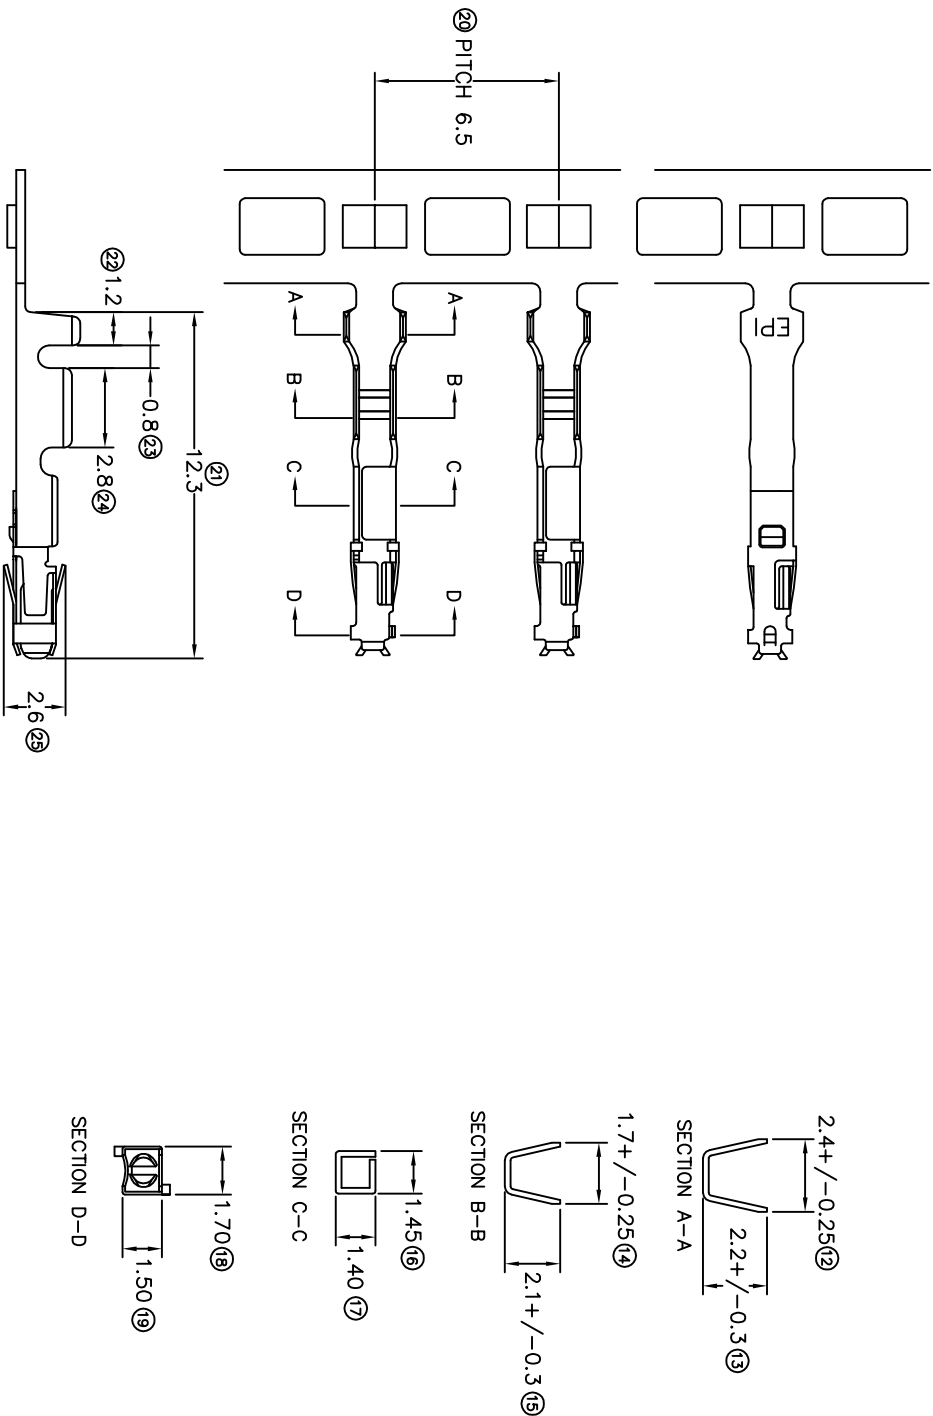

FOR REFERENCE ONLY

- 11) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 10) TEMPERATURE RANGE -40°C TD +120°C.
- 9) VOLTAGE-MAX [VDLTS] PER WIRE SPECIFICATION.
- 8) HOUSING LOCK FORCE: MIN 4.0KG.
- 7) MATCHING WITH TAB to 6 X W1.0.
- 6) TENSILE FORCE : MIN 0.05KG. (WITH JIG EPI)
- 5) INSERT FORCE : MAX 0.20KG. (WITH JIG EPI)
- 4) THICKNESS PLATING MORE THAN 40 μ INCH.
- 3) PACKING QTY : 6000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 1.3MM.
- 1) APPLICABLE WIRE RANGE : 0.36-0.16MM².

SPECIFICATION :

REVISION:	02	DIMENSIONS :	MM	MATERIAL:	1) CLIP to 10 SUS 301 2) BODY to 20 PHOSPHOR BRONZE C5191
TOLERANCE UNLESS OTHERWISE SPECIFIED:	X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50	DWN:	KS YEW	TREATMENT SELECTIVE	PRE-TIN PLATED 170403-2T
CHK:	SC CHOO	PART NAME:	EPI Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.		
APVD:	CHUANG	APPLICABLE (1) TERMINALS (2) HOUSING	040 SERIES FEMALE TERMINALS (1) TAB to 6 X 1.0 (2) 2E HILLER, 1 304 488 083		
SCALE :	FREE	DRAWING NO:	A1451	EFFECTIVE DATE :	11/7/07
SHEET OF :	1 / 1				