






# TERMINALS SPECIFICATION DRAWING




SECTION D-D




SECTION A-A

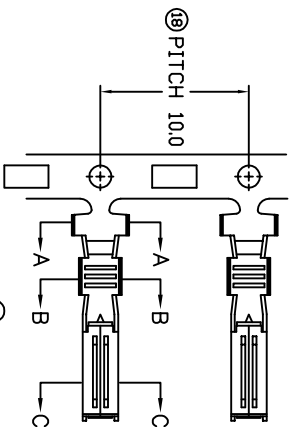

SECTION C-C




SECTION B-B



**FOR REFERENCE ONLY**

- 10) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER
- 11) BREAK OFF INTENSITY.
- 9) TEMPERATURE RANGE: -40°C TO +120°C.
- 8) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 7) MATCHING WITH TAB 10.8 X W1.7.
- 6) TENSILE FORCE : MIN 0.35KG.
- 5) INSERT FORCE : MAX 0.65KG.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 4500 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.4MM.
- 1) APPLICABLE WIRE RANGE : 0.98-0.44MMφ.

SPECIFICATION :

 REVISION: 03	MATERIAL: 10.25 PHOSPHOR BRONZE C5191		PRE-TIN PLATED		170602H-2T
	DIMENSIONS : MM		TREATMENT SELECTIVE		PART NUMBER
TOLERANCE UNLESS OTHERWISE SPECIFIED:		CHK: HY LIM	EPI Terminals & Connectors		
X.XXX +/-0.05		APVD: CHUANG	Eloomp Precision Industry(M) Sdn.Bhd.		
X.XX +/-0.10		SCALE : FREE	PART NAME:		
X +/-0.20		DRAWING NO: A1406	060 SERIES FEMALE TERMINALS		
X +/-0.50		EFFECTIVE DATE: 24/9/07	APPLICABLE (1) TERMINALS (2) HOUSING		
SHEET OF : 1 / 1			(2) FV-JC-20F.FV-JC-10F		