

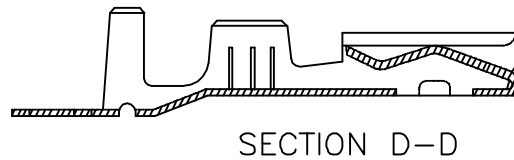
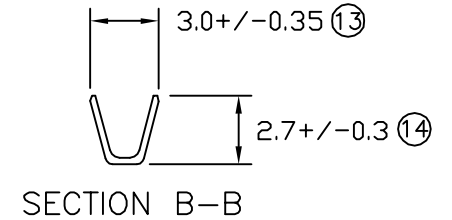
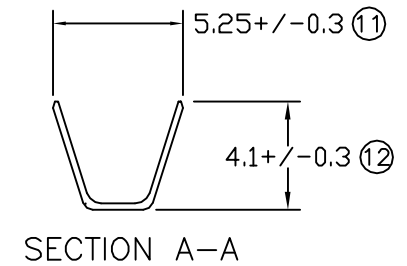
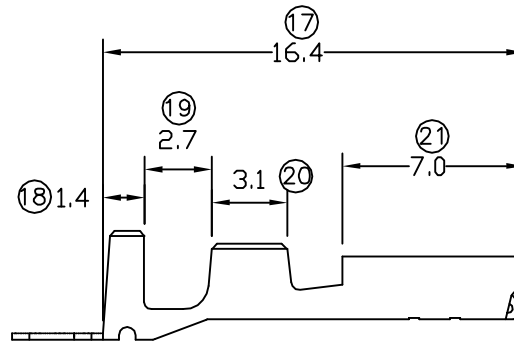


TERMINALS SPECIFICATION DRAWING

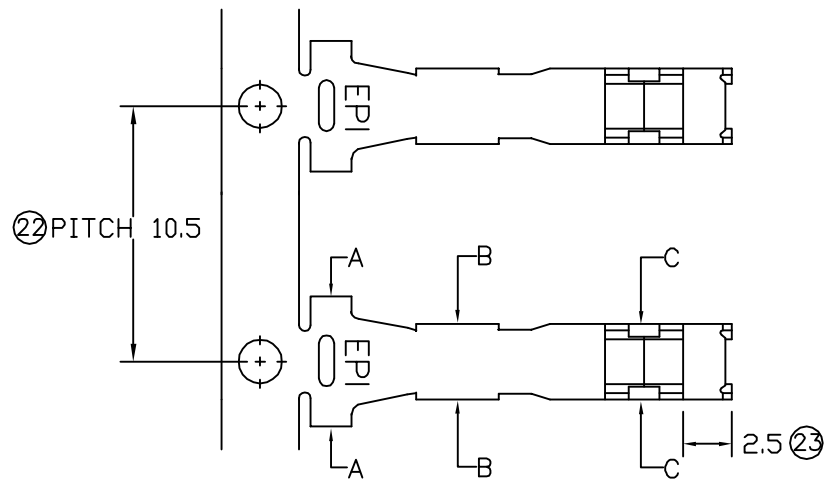

□ MATCHING DIMENSION


- 10) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 9) TEMPERATURE RANGE -40°C TO $+120^{\circ}\text{C}$.
- 8) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 7) MATCHING WITH TAB $t0.6 \times W2.2$.
- 6) TENSILE FORCE : MIN 0.20KG.
- 5) INSERT FORCE : MAX 0.50KG.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 4500 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.5MM.
- 1) APPLICABLE WIRE RANGE : $0.69-0.31\text{MM}^2$.

SPECIFICATION :

FOR REFERENCE ONLY

MATERIAL: t0.25 BRASS C2680	-	-
	PRE-TIN PLATED	170901M-2T
	TREATMENT SELECTIVE	PART NUMBER
DIMENSIONS : MM	PREPARE BY: KS YEW	EPI Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.
TOLERANCE UNLESS OTHERWISE SPECIFIED: X.XXX \pm 0.05 X.XX \pm 0.10 X.X \pm 0.20 X \pm 0.50	REVIEWED BY: CH ANG	
	APPROVED BY: YL CHUANG	PART NAME: 090 SERIES FEMALE TERMINALS
	SCALE : FREE	APPLICABLE (1) TERMINALS (2) HOUSING
	DRAWING NO: A1262	(1) 27091M (2) SCOCFGY,J12FT/L-C
	EFFECTIVE DATE : 29/3/10	

REVISION:
07



SHEET OF :
1 / 1

07	29/3/10	5) INSERT FORCE: MAX 0.40KG CHANGE TO 0.50KG.
REV.	DATE	AMENDMENT