


SPECIFICATION DRAWING

MASTER COPY

ITEM NO	MATERIAL	TREATMENT	QTY/REEL	REEL/CARTON	MATCHING PART(S)
17096M-2T	t0.25 BRASS (C2680)	PRE-TIN PLATED	4000 PCS	6	TERMINAL-27096, TAB t0.6XW2.2 HOUSING-090 SERIES

SYMBOL	DESCRIPTION
○	DIMENSION INSPECTED DURING SETUP AND OUTGOING.
□	DIMENSION INSPECTED HOURLY.
SPC	STATISTICALLY CONTROLLED DIMENSION.
△	JIG USED DURING INSPECTION.

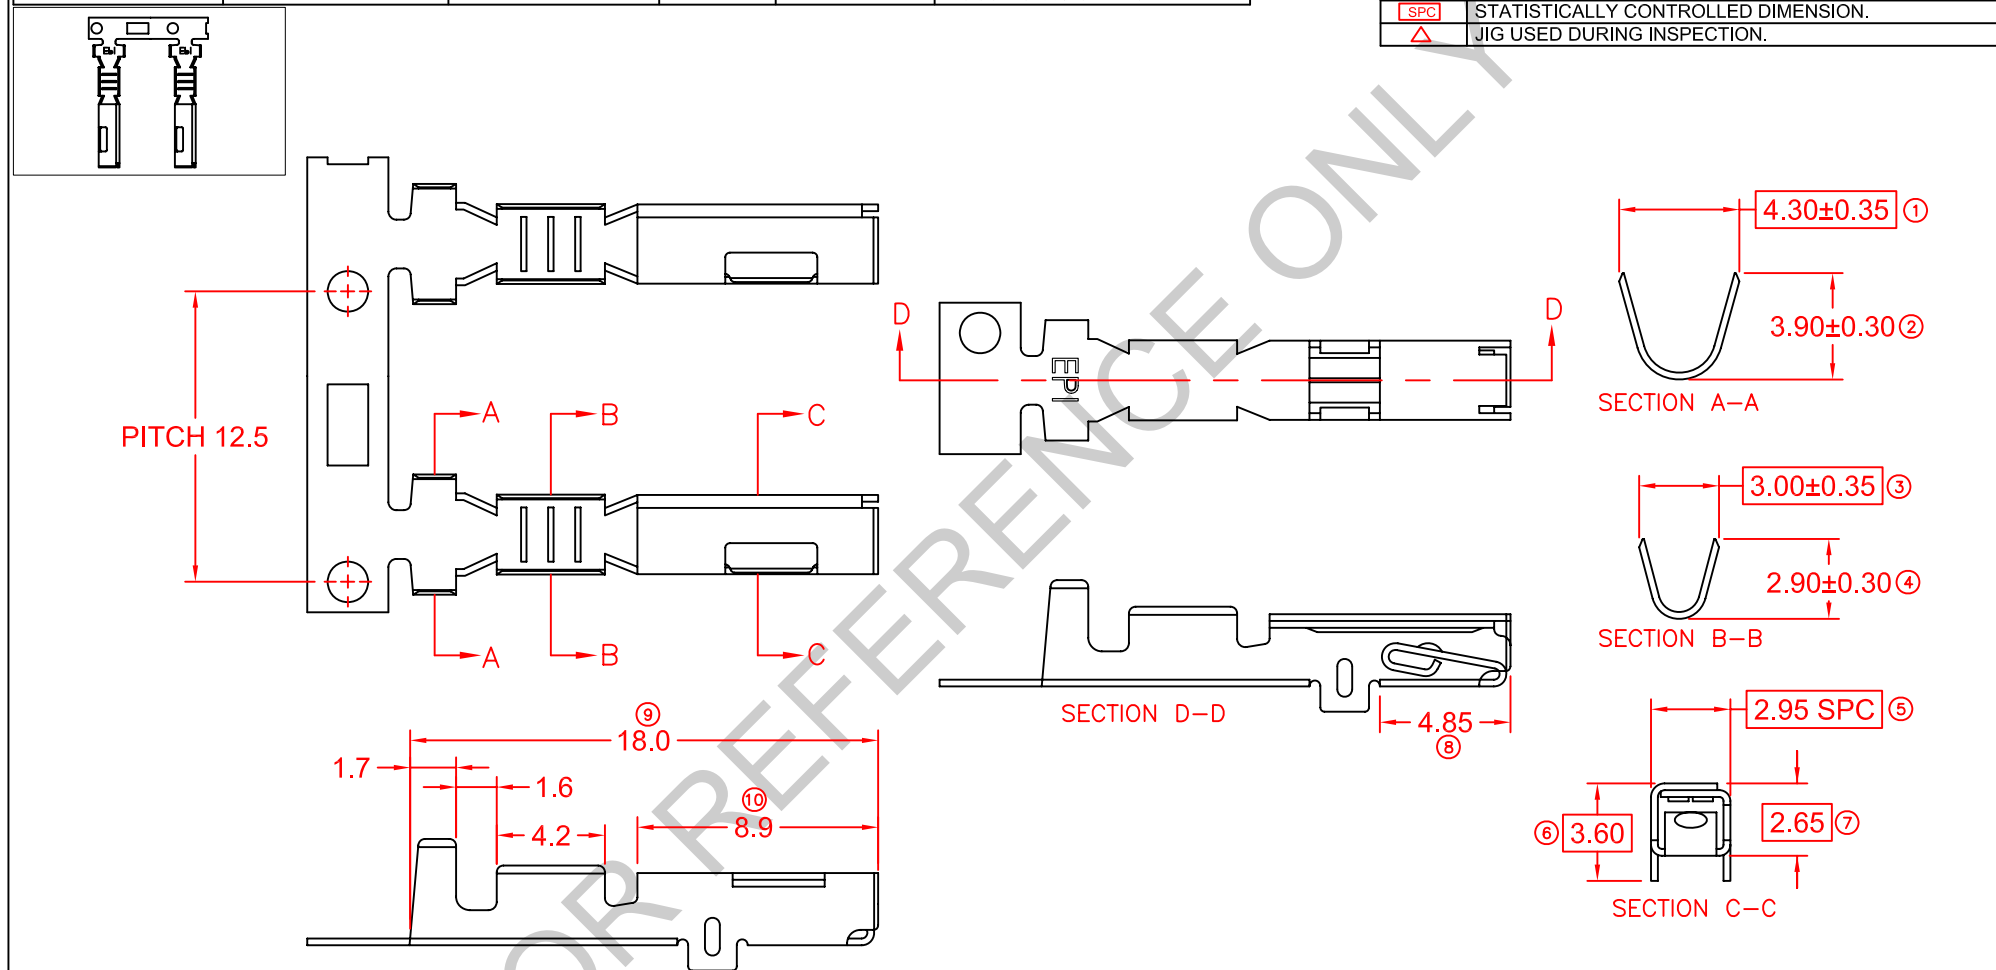

REMARKS:

- a) PLATING THICKNESS MIN 40μ INCH
- b) SUGGESTED WIRE INSULATION (O.D): 2.4MM
- c) SUGGESTED WIRE RANGE: 0.75-0.33MM² (AWG16-20)
- d) INSERT FORCE: MAX 0.65KG
- e) TENSILE FORCE: MIN 0.25KG

				REVISION: 07	GENERAL TOLERANCE UNLESS SPECIFIED: X.XXX ±0.05 X.XX ±0.10 X.X ±0.20 X ±0.50	PREPARE BY: KS YEW	Elamp Precision Industry(M) Sdn.Bhd.
				⊕		REVIEWED BY: CH ANG	
07	15/8/11	UPDATE TO NEW FORMAT	-	⊕		APPROVED BY: CY CHUANG	ITEM NO: 17096M-2T
REV.	DATE	AMENDMENT	ECR NO:	SHEET OF: 1 / 1	EFFECTIVE DATE: 15/8/11	SCALE : FREE UNIT : MM	DRAWING NO: EP-Q-236A