


TERMINALS SPECIFICATION DRAWING

UNCONTROLLED COPY

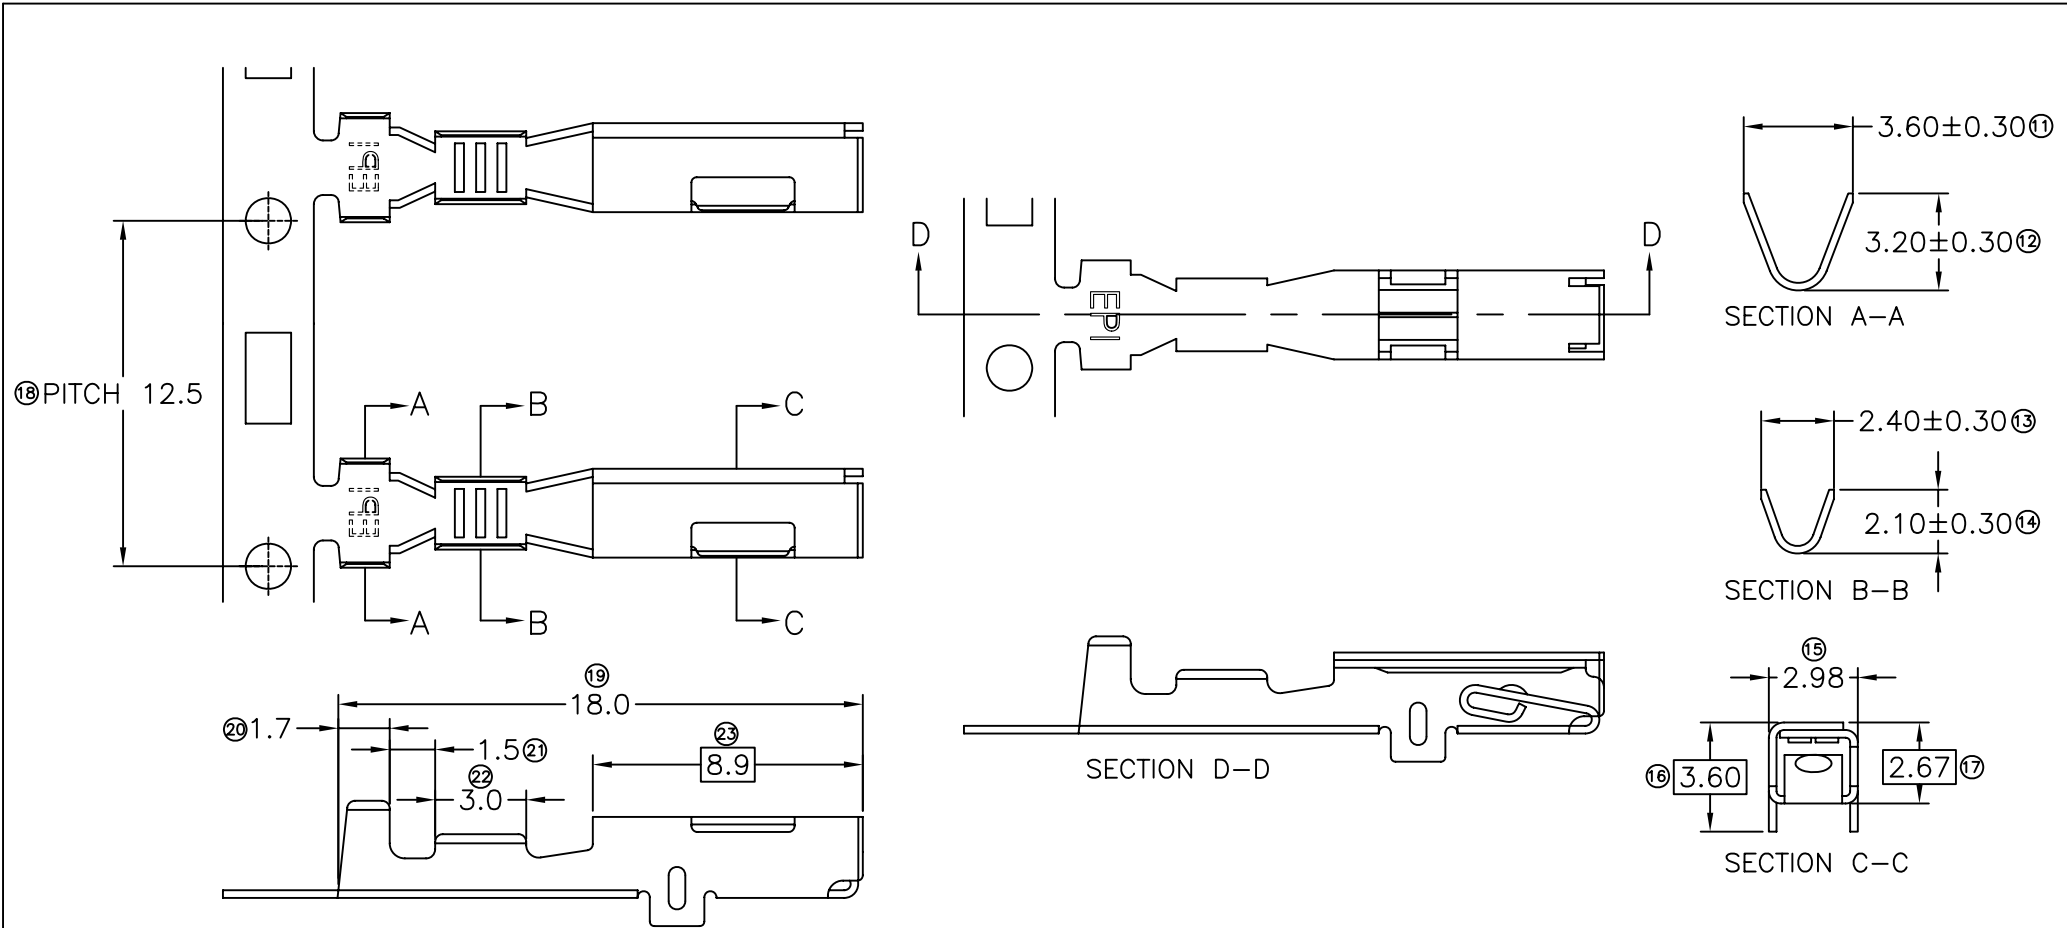

☐ MATCHING DIMENSION

- 10) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 9) TEMPERATURE RANGE -40°C TO +120°C.
- 8) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 7) MATCHING WITH TAB t0.6 X W2.2.
- 6) TENSILE FORCE : MIN 0.22KG.
- 5) INSERT FORCE : MAX 0.75KG.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 4000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 1.9MM.
- 1) APPLICABLE WIRE RANGE : 0.24~0.11MM².

SPECIFICATION :

FOR REFERENCE ONLY

MATERIAL:	-	-	
t0.25 BRASS C2680	PRE-TIN PLATED	17096S-2T	
	TREATMENT SELECTIVE	PART NUMBER	
DIMENSIONS : MM	PREPARE BY: KS YEW	EPI Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.	
TOLERANCE UNLESS OTHERWISE SPECIFIED:	REVIEWED BY: CH ANG		
X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50	APPROVED BY: YL CHUANG	PART NAME: 090 SERIES FEMALE TERMINALS	
	SCALE : FREE	APPLICABLE (1) TERMINALS (2) HOUSING	
	DRAWING NO: A1512	(1) 27096 (2) 090 SERIES HOUSING	
	EFFECTIVE DATE : 21/5/10		

				REVISION: 01					
01	21/5/10	UPDATE DRAWING		SHEET OF : 1 / 1					
REV.	DATE	AMENDMENT							