


TERMINALS SPECIFICATION DRAWING

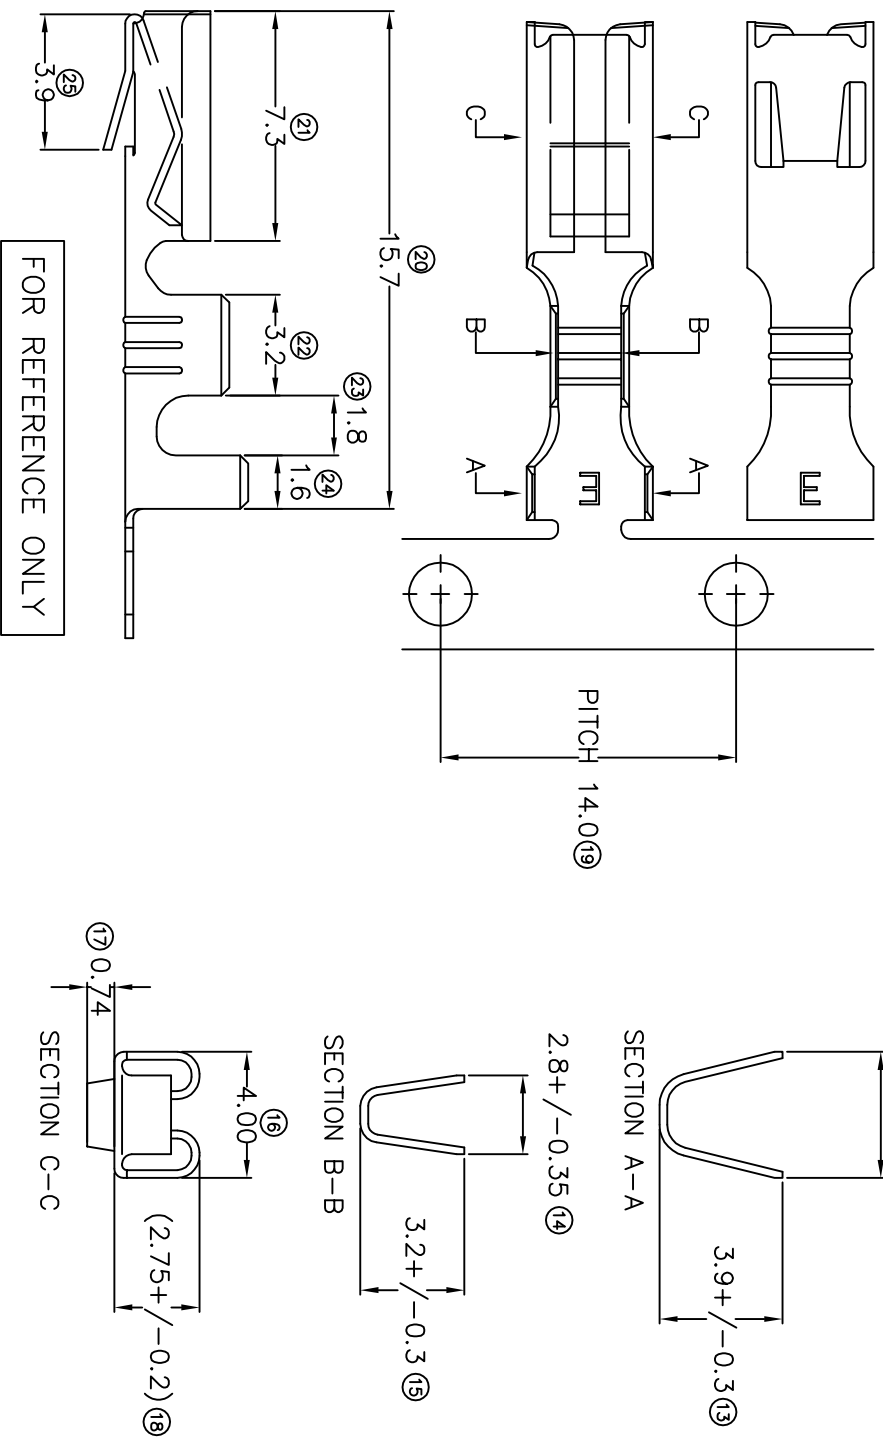

- 11) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 10) TEMPERATURE RANGE -40°C TD +120°C.
- 9) VOL TAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 8) ⁽¹³⁾ FOR REFERENCE ONLY.
- 7) MATCHING WITH TAB 10.5 X W2.8.
- 6) TENSILE FORCE : MIN 0.40KG.
- 5) INSERT FORCE : MAX 0.80KG.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 5000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.3MM.
- 1) APPLICABLE WIRE RANGE : 0.87-0.39MM².

SPECIFICATION :

MATERIAL: t0.25 BRASS C2680	TIN PLATING		
DIMENSIONS : MM	TREATMENT SELECTIVE		
TOLERANCE UNLESS OTHERWISE SPECIFIED:	DWN: KS YE W	CHK: SC CHOO	APVD: CHUANG
X.XXX +/-0.05			
X.XX +/-0.10			
X.X +/-0.20			
X +/-0.50			
EFFECTIVE DATE : 12/7/07	SCALE : FREE	DRAWING NO.: A1388	PART NAME: 110 SERIES FEMALE TERMINALS
SHEET OF : 1 / 1			APPLICABLE (1) TERMINALS (2) HOUSING
			(1) TAB 10.5 X W2.8
			(2) 110 SERIES HOUSING
			EPJ Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.
			171103-2
			171103-1
			PART NUMBER