

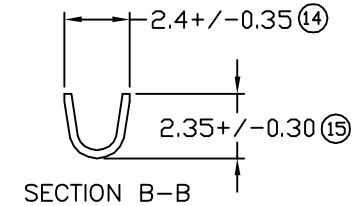

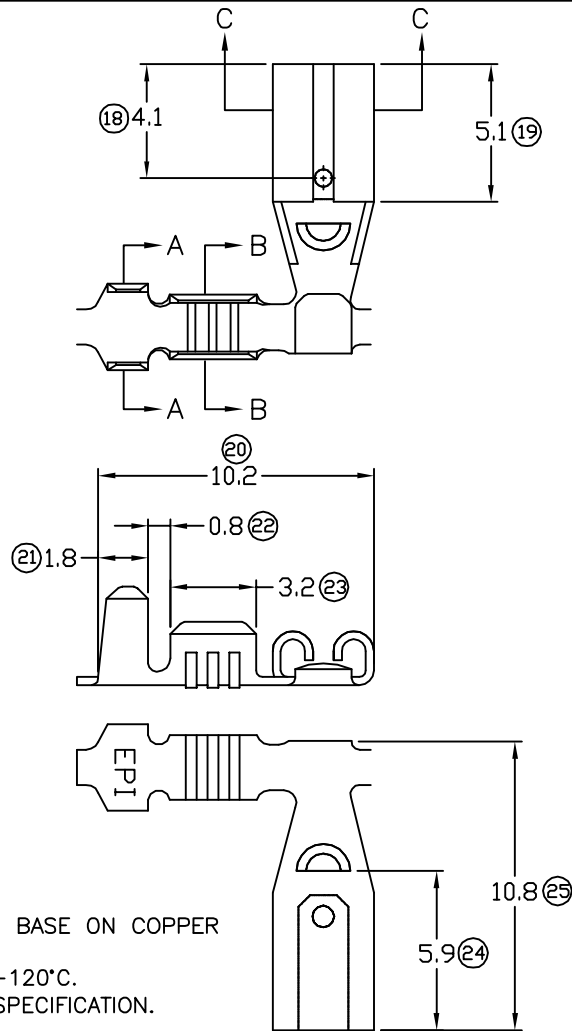


TERMINALS SPECIFICATION DRAWING



- 11) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 10) TEMPERATURE RANGE -40°C TO +120°C.
- 9) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 8) ⑰ FOR REFERENCE ONLY.
- 7) MATCHING WITH TAB t0.5 X W2.8.
- 6) TENSILE FORCE : MIN 1.20KG.
- 5) INSERT FORCE : MAX 3.20KG.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 5000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.1MM.
- 1) APPLICABLE WIRE RANGE : 0.46-0.20MM².

FOR REFERENCE ONLY

| | | |
|---|---|--|
| MATERIAL: t0.30 BRASS C2680 | NONE | 171107F-1 |
| | PRE-TIN PLATED | 171107F-2T |
| | TREATMENT SELECTIVE | PART NUMBER |
| DIMENSIONS : MM TOLERANCE UNLESS OTHERWISE SPECIFIED: X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50 | DWN: KS YEW CHK: C.Y CHUANG Y.L APVD: CHUANG SCALE : FREE DRAWING NO: A1461 | EPI Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd. PART NAME: 110 SERIES FEMALE TERMINALS APPLICABLE (1) TERMINALS (2) HOUSING (1) TAB t0.5 X W2.8 (2) F110-UL |
| REVISION: 03  SHEET OF : 1 / 1 | EFFECTIVE DATE : 28/4/09 | |

SPECIFICATION :

| REV. | DATE | AMENDMENT |
|------|----------|---|
| 03 | 28/7/09 | ADD ITEM 171107F-1 |
| 02 | 24/11/08 | 5) INSERT FORCE MAX 2.3KG CHANGE TO MAX 3.20KG, TENSILE FORCE MIN 1.1KG CHANGE TO MIN 1.20KG. |