
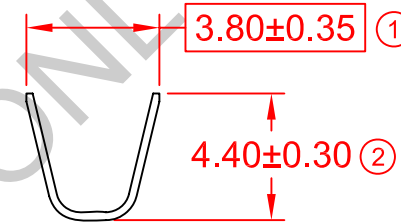
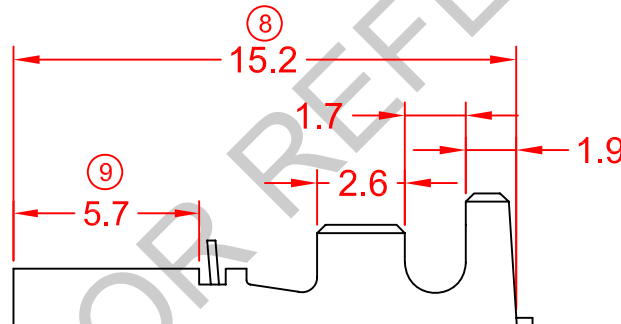
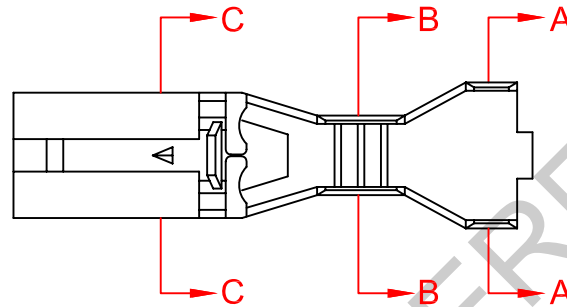
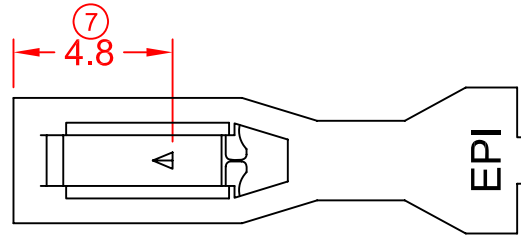


SPECIFICATION DRAWING


MASTER COPY

ITEM NO	MATERIAL	TREATMENT	QTY/REEL	REEL/CARTON	MATCHING PART(S)
172110H-1	t0.25 BRASS (C2680)	NONE	10000 PCS	4	TERMINAL-TAB t0.5 XW2.8
172110H-2	t0.25 BRASS (C2680)	TIN PLATING	10000 PCS	4	HOUSING-N/A


SYMBOL	DESCRIPTION
○	DIMENSION INSPECTED DURING SETUP AND OUTGOING.
□	DIMENSION INSPECTED HOURLY.
SPC	STATISTICALLY CONTROLLED DIMENSION.
△	JIG USED DURING INSPECTION.



SECTION A-A

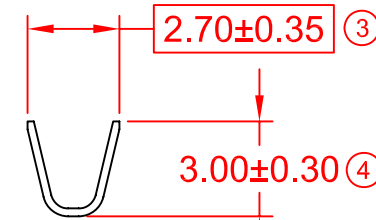

SECTION B-B

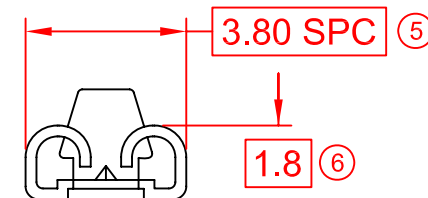

SECTION C-C

REMARKS:

- a) PLATING THICKNESS MIN 40μ INCH
- b) SUGGESTED WIRE INSULATION (O.D): 2.5MM
- c) SUGGESTED WIRE RANGE: 0.83~0.37MM² (AWG16~18)
- d) INSERT FORCE: MAX 2.20KG
- e) TENSILE FORCE: MIN 5.00KG

				REVISION: 05	GENERAL TOLERANCE UNLESS SPECIFIED: X.XXX ±0.05 X.XX ±0.10 X.X ±0.20 X ±0.50	PREPARE BY: KS YEW	Elamp Precision Industry(M) Sdn.Bhd.
						REVIEWED BY: CH ANG	
				SHEET OF: 1 / 1	EFFECTIVE DATE: 23/12/11	APPROVED BY: CY CHUANG	ITEM NO: 172110H-1, 2
05	23/12/11	UPDATE TO NEW FORMAT	-			SCALE : FREE	DRAWING NO: EP-Q-169A
REV.	DATE	AMENDMENT	ECR NO:			UNIT : MM	