


TERMINALS SPECIFICATION DRAWING

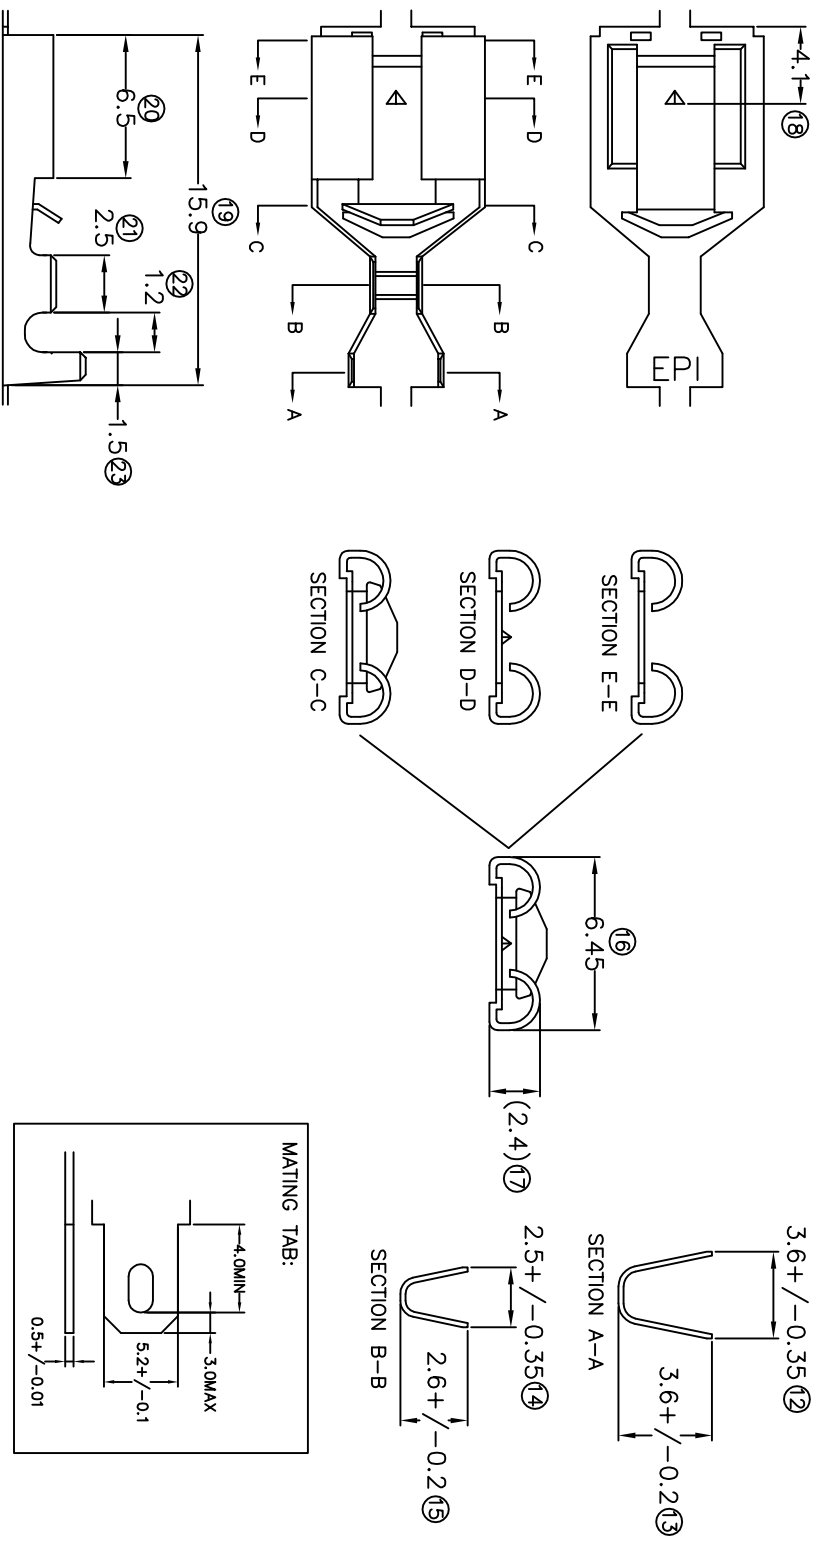

FOR REFERENCE ONLY

- 11) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 10) TEMPERATURE RANGE : -40°C TD +120°C.
- 9) VOLTAGE-MAX (VOLTAGE) PER WIRE SPECIFICATION.
- 8) (17) FOR REFERENCE ONLY.
- 7) MATCHING WITH TAB ±0.5 X W5.2.
- 6) TENSILE FORCE : MAX 5.00KG.
- 5) INSERT FORCE : MAX 3.20KG.
- 4) THICKNESS PLATING MORE THAN 40µ INCH.
- 3) PACKING QTY : 7500 PCS/REEL.
- 2) WIRE INSULATION (O.D.) : 2.1MM.
- 1) APPLICABLE WIRE RANGE : 0.55-0.24MM².

SPECIFICATION :

	REVISION: 03				
SHEET OF : 1 / 1	EFFECTIVE DATE : 23/7/07	DRAWING NO: A1281	MATERIAL: t0.3 BRASS C2680	DIMENSIONS : MM	TOLERANCE UNLESS OTHERWISE SPECIFIED: X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50
TIN PLATING		DWN:KS YE W		CHK: SC CHOO	
NONE		Y.L		APVD: CHUANG	
TREATMENT SELECTIVE		SCALE : FREE		PART NAME: 205 SERIES FEMALE TERMINALS	
PART NUMBER		DRAWING NO: A1281		APPLICABLE (1) TERMINALS (2) HOUSING (1) TAB 10.5 X W5.2 (2) -	
172205S-2		A1281		EPJ Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.	
172205S-1		A1281		205 SERIES FEMALE TERMINALS	
PART NUMBER		A1281		APPLICABLE (1) TERMINALS (2) HOUSING (1) TAB 10.5 X W5.2 (2) -	

