

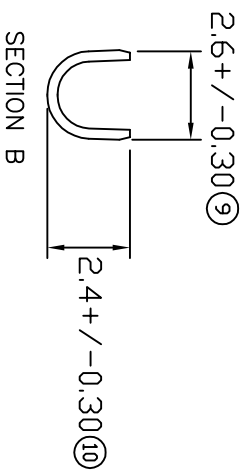
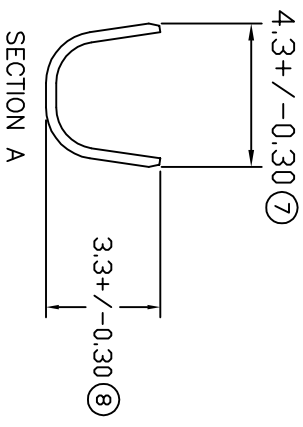


TERMINALS SPECIFICATION DRAWING

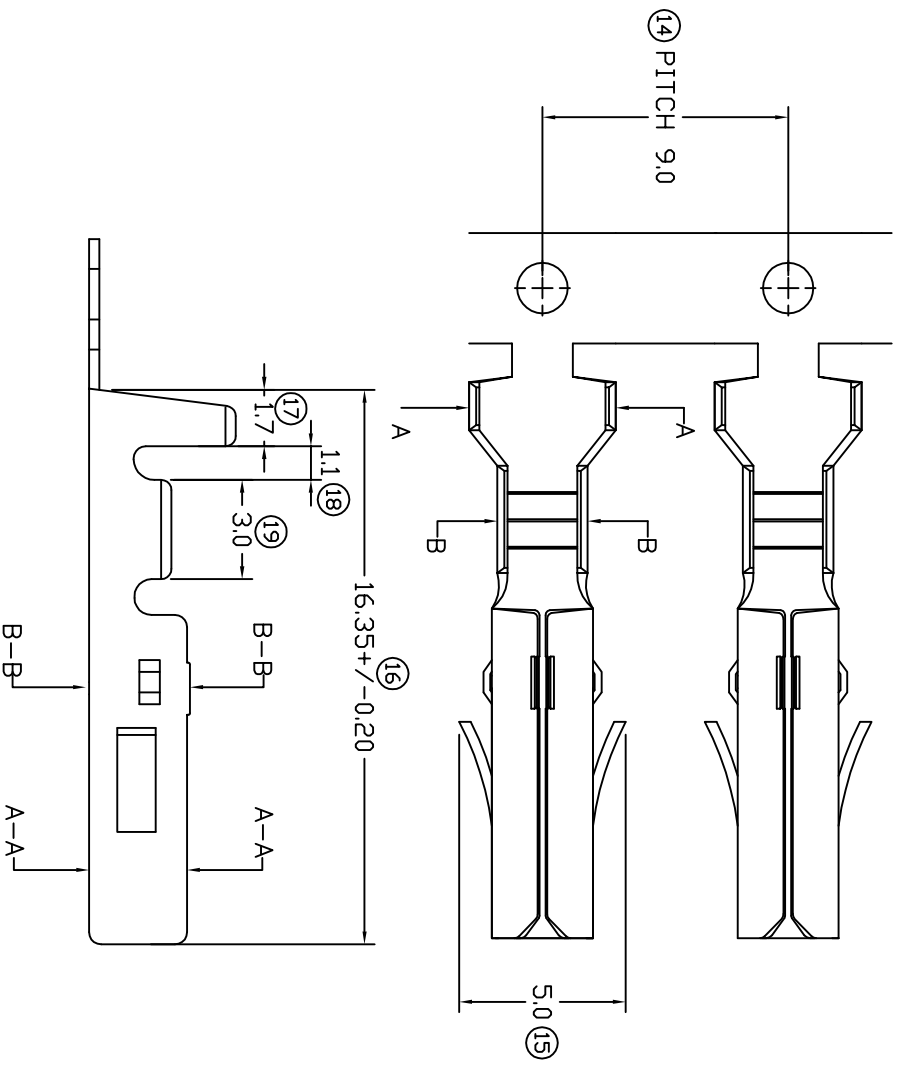

FOR REFERENCE ONLY

- 6) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 5) TEMPERATURE RANGE -40°C TO +120°C.
- 4) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 3) PACKING QTY : 7000 PCS/REEL.
- 2) WIRE INSULATION (O.D.) : 2.0MM.
- 1) APPLICABLE WIRE RANGE : 0.54-0.24MM².

SPECIFICATION :

| | | | | |
|--|----------------------------|---|---|-------------------------------|
| MATERIAL: t0.30 BRASS C2680 | | TREATMENT NONE | | PART NUMBER 18021-1 |
| DIMENSIONS : MM | DWN: KS YE'W | CHK: HY LIM | Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd. | |
| TOLERANCE UNLESS OTHERWISE SPECIFIED: | APVD: CHUANG | SCALE : FREE | | |
| X.XXX +/-0.05 | DRAWING NO: | APPLICABLE (1) TERMINALS (2) HOUSING | | |
| X.XX +/-0.10 | A1513 | (1) 28021 | | |
| X.X +/-0.20 | EFFECTIVE DATE : | (2) 1840P4 | | |
| X +/-0.50 | 19/9/07 | | | |
| REVISION: 00 | SHEET OF : 1 / 1 | | | |