
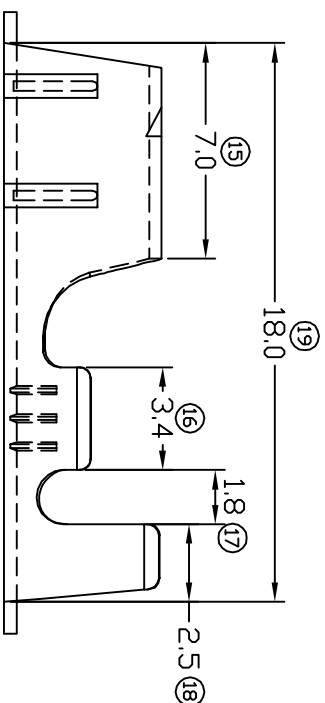

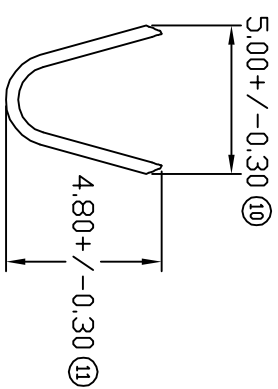
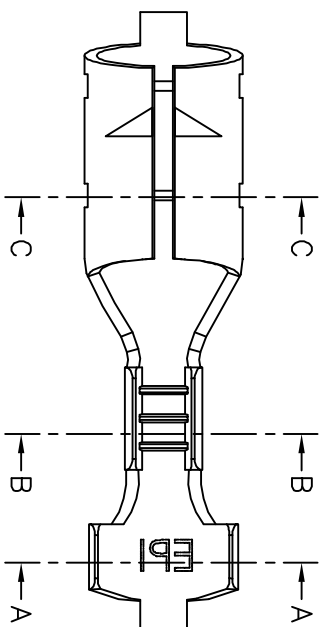


# TERMINALS SPECIFICATION DRAWING

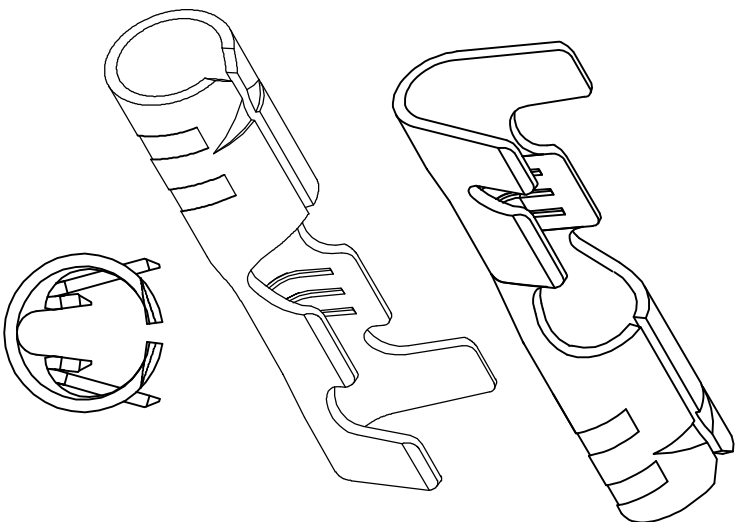

- 9) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 8) TEMPERATURE RANGE -40°C TO +120°C.
- 7) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 6) TENSILE FORCE : MIN 2.50KG.
- 5) INSERT FORCE : MAX 4.50KG.
- 4) THICKNESS PLATING MORE THAN 40µ INCH.
- 3) PACKING QTY : 8000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.7MM.
- 1) APPLICABLE WIRE RANGE : 0.58-0.26MM².

SPECIFICATION :

**FOR REFERENCE ONLY**

REVISION:

02



SHEET OF :

1 / 1

REV.	DATE	CHANGE DIM FR	FR (15) 7.2 TO 7.0, FR (16) 3.3 TO 3.4
02	11/11/08	CHANGE DIM FR	(15) 7.2 TO 7.0, FR (16) 3.3 TO 3.4

MATERIAL:	TIN PLATING	18041AS-2
to.35 BRASS	NONE	18041AS-1
C2680	TREATMENT SELECTIVE	PART NUMBER
DIMENSIONS : MM	DWN: KS YEW	
TOLENANCE UNLESS OTHERWISE SPECIFIED:	CHK: CHUANG	
X.XXX +/-0.05	APVD: CHUANG	
X.XX +/-0.10	SCALE : FREE	
X.X +/-0.20	DRAWING NO:	
X +/-0.50	A1497	
EFFECTIVE DATE :		
11/11/08		

**EPI** Terminals & Connectors  
Eiamp Precision Industry(M) Sdn.Bhd.

PART NAME:

ø4.00MM BULLET TERMINALS

APPLICABLE (1) TERMINALS (2) HOUSING

(1) 28041

(2) -