
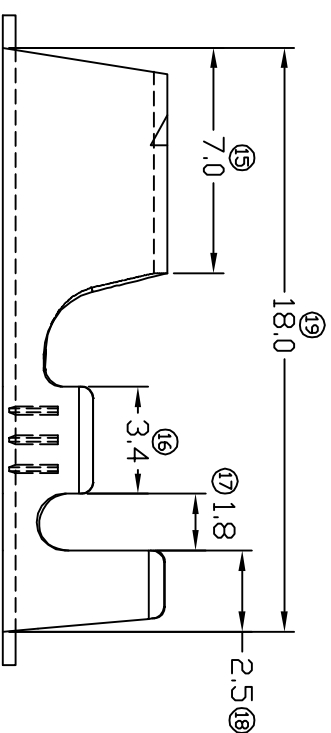

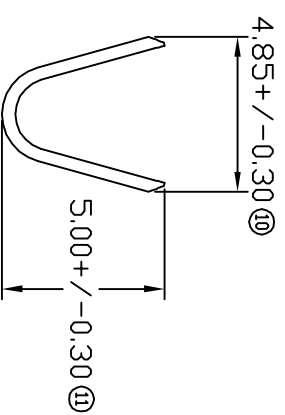
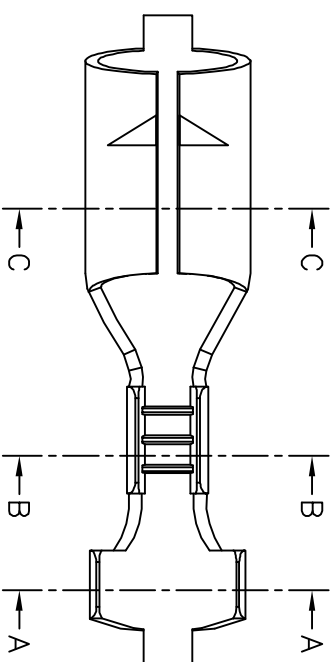


TERMINALS SPECIFICATION DRAWING

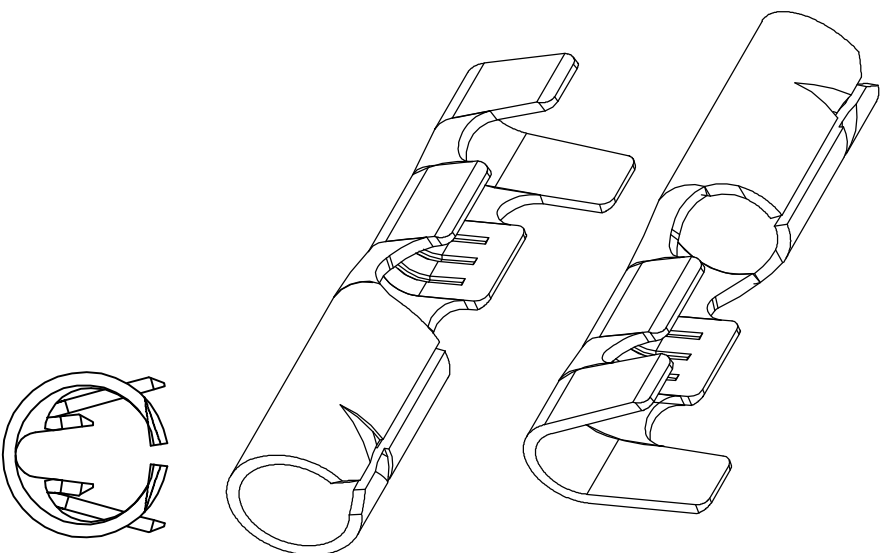

- 9) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 8) TEMPERATURE RANGE -40°C TO +120°C.
- 7) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 6) TENSILE FORCE : MIN 2.0KG.
- 5) INSERT FORCE : MAX 3.5KG.
- 4) THICKNESS PLATING MORE THAN 40µ INCH.
- 3) PACKING QTY : 8000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.7MM.
- 1) APPLICABLE WIRE RANGE : 0.78~0.40MM²

SPECIFICATION :

FOR REFERENCE ONLY

REVISION:

02



SHEET OF :
1 / 1

CHANGE DIM FR (10) 4.8±0.3 TO 4.85±0.30,
FR (12) 2.65±0.3 TO 2.50±0.30, FR (16) 3.3 TO 3.4

REV. DATE

AMENDMENT

MATERIAL: t0.40 BRASS C2680		TIN PLATING	
DIMENSIONS : MM		NONE	
TOLERANCE UNLESS OTHERWISE SPECIFIED:		TREATMENT SELECTIVE	
DWN: KS YEW		PART NUMBER	
CHK: CHUANG		Eiamp Precision Industry(M) Sdn.Bhd.	
APVD: CHUANG		PART NAME:	
SCALE : FREE		ø4.00MM BULLET TERMINALS	
DRAWING NO: A1476		APPLICABLE (1) TERMINALS (2) HOUSING	
EFFECTIVE DATE : 13/11/08		(1) 28041	
		(2) -	