

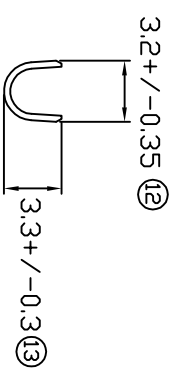
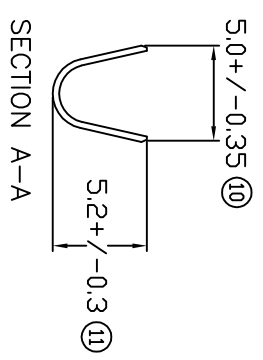
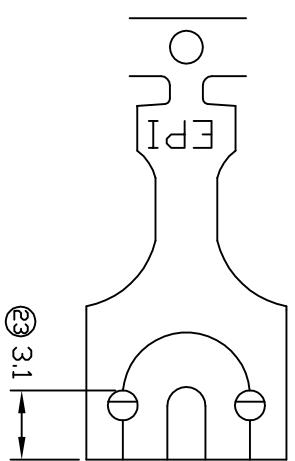
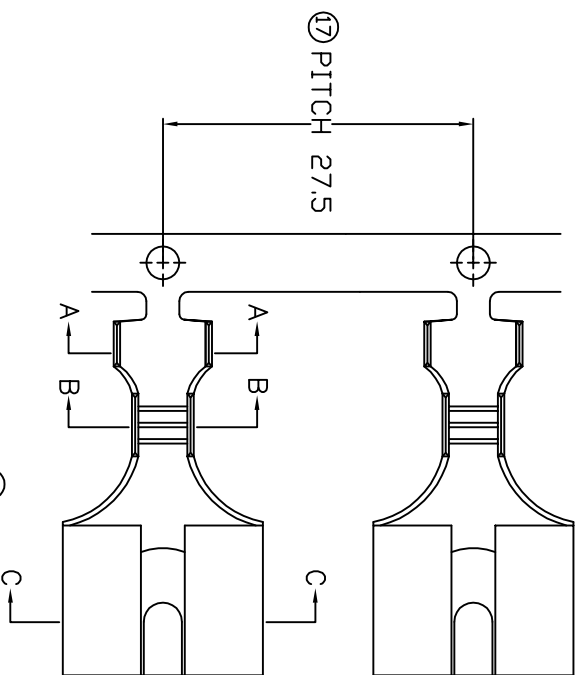


TERMINALS SPECIFICATION DRAWING

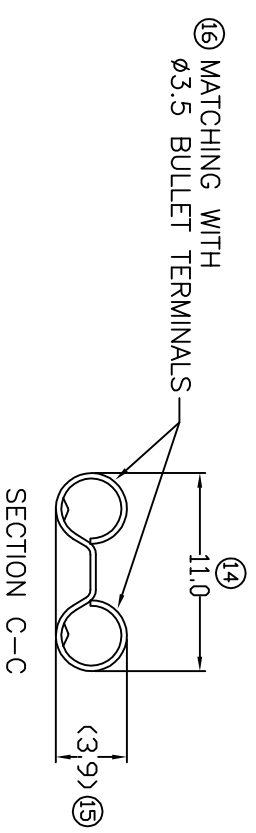

SECTION B-B

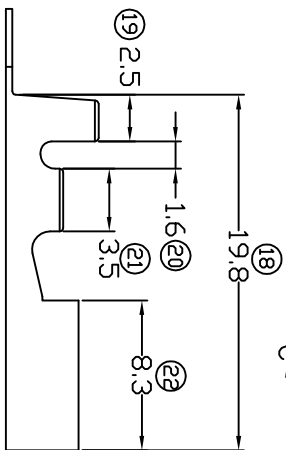

14 MATCHING WITH
3.5 BULLET TERMINALS

FOR REFERENCE ONLY

- 9) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 8) TEMPERATURE RANGE -40i°C TO +120i°C.
- 7) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 6) 15 FOR REFERENCE ONLY.
- 5) TENSILE FORCE : MIN 2.00KG.
- 4) INSERT FORCE : MAX 2.00KG.
- 3) PACKING QTY : 1500 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 3.0MM.
- 1) APPLICABLE WIRE RANGE : 1.03-0.46MM².

SPECIFICATION :

REVISION:		SHEET OF :	
02	1	1	1
MATERIAL:		EFFECTIVE DATE :	
10.30 BRASS		28/11/07	
C2680		A1462	
DIMENSIONS : MM		DWN: KS YEW	
TOLERANCE UNLESS OTHERWISE SPECIFIED:		CHK: HY LIM	
X.XXX	+/-0.05	Y.L	
X.XX	+/-0.10	APVD: CHUANG	
X.X	+/-0.20	SCALE : FREE	
X	+/-0.50	DRAWING NO:	
MATERIAL:		PART NAME:	
NONE		Eiamp Precision Industry(M) Sdn.Bhd.	
TREATMENT SELECTIVE		PART NUMBER	
18241-1		4.0MM DIA. BULLET TERMINALS	
PART NUMBER		APPLICABLE (1) TERMINALS (2) HOUSING	
18241-1		(1) 28041	
PART NUMBER		(2) -	
18241-1			