
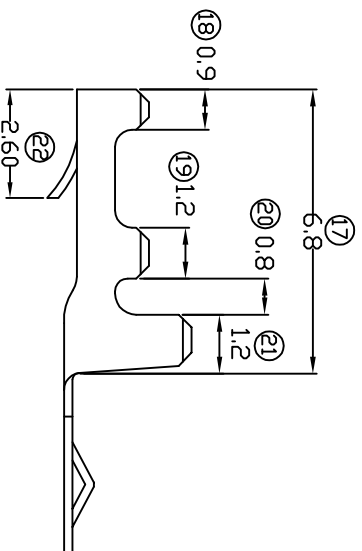
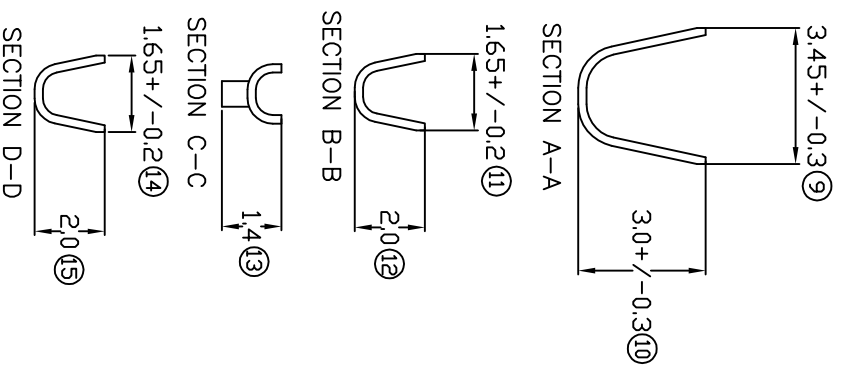


TERMINALS SPECIFICATION DRAWING

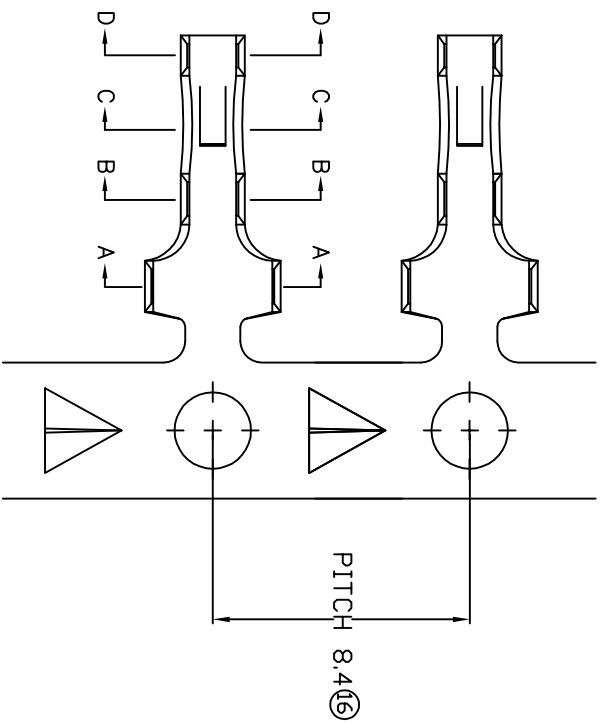

FOR REFERENCE ONLY

- 8) FOR PC BOARD HOLE DIA. 1.4 MM.
- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TO +120°C.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 8000 PCS/REEL.
- 2) WIRE INSULATION (O.D.) : 1.7MM.
- 1) APPLICABLE WIRE RANGE : 0.30-0.13MM².

SPECIFICATION :

MATERIAL: TO.20 BRASS C2680		PRE-TIN PLATED TIN PLATING		22014-2T
DIMENSIONS : MM TOLERANCE UNLESS OTHERWISE SPECIFIED: X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50		DWN: KS YEY CHK: SC CHOO APVD: CHUANG SCALE : FREE DRAWING NO:		PART NUMBER 22014-2
EFFECTIVE DATE : 11/7/07		TREATMENT SELECTIVE		PART NAME: BOARD-IN CRIMP STYLE TERMINALS APPLICABLE (1) TERMINALS (2) HOUSING
SHEET OF : 1 / 1		REVISION: 02		A1353