


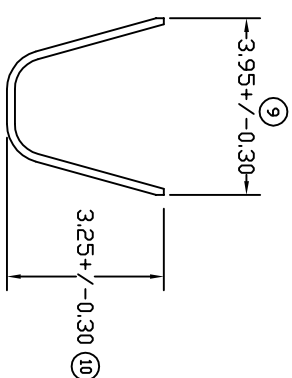
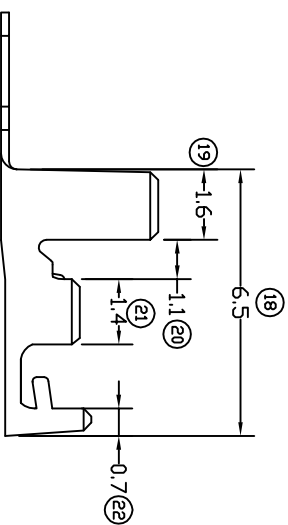


TERMINALS SPECIFICATION DRAWING

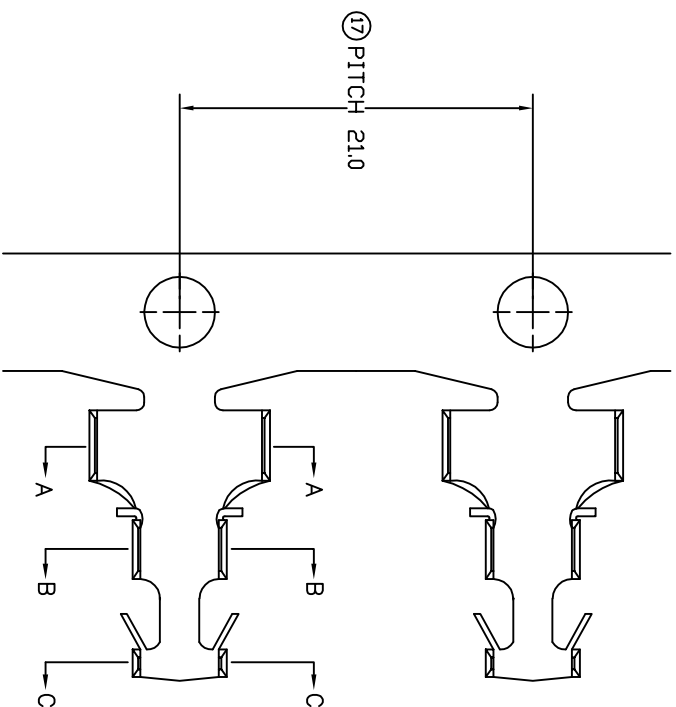

FOR REFERENCE ONLY

- 8) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 7) TEMPERATURE RANGE -40°C TO +120°C.
- 6) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 5) FOR PC BOARD ϕ 1.85.
- 4) THICKNESS PLATING MORE THAN 40 μ INCH.
- 3) PACKING QTY : 10000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.0MM.
- 1) APPLICABLE WIRE RANGE : 0.45-0.20MM².

SPECIFICATION :

MATERIAL: TO.20 PHOSPHOR BRONZE C5191	TREATMENT TIN PLATED	PART NUMBER 22019PA-2
DIMENSIONS : MM	DWN: KS YE'W	
TOLERANCE UNLESS OTHERWISE SPECIFIED:	CHK: HY LIM	
X.XXXX +/-0.05	APVD: CHUANG	PART NAME:
X.XXX +/-0.10	SCALE : FREE	BOARD-IN CRIMP STYLE TERMINALS
X.XX +/-0.20	DRAWING NO:	APPLICABLE (1) TERMINALS (2) HOUSING
X.X +/-0.50	A1352	(1) -
EFFECTIVE DATE : 20/9/07		(2) -
REVISION: 02		
SHEET OF : 1 / 1		