



TERMINALS SPECIFICATION DRAWING

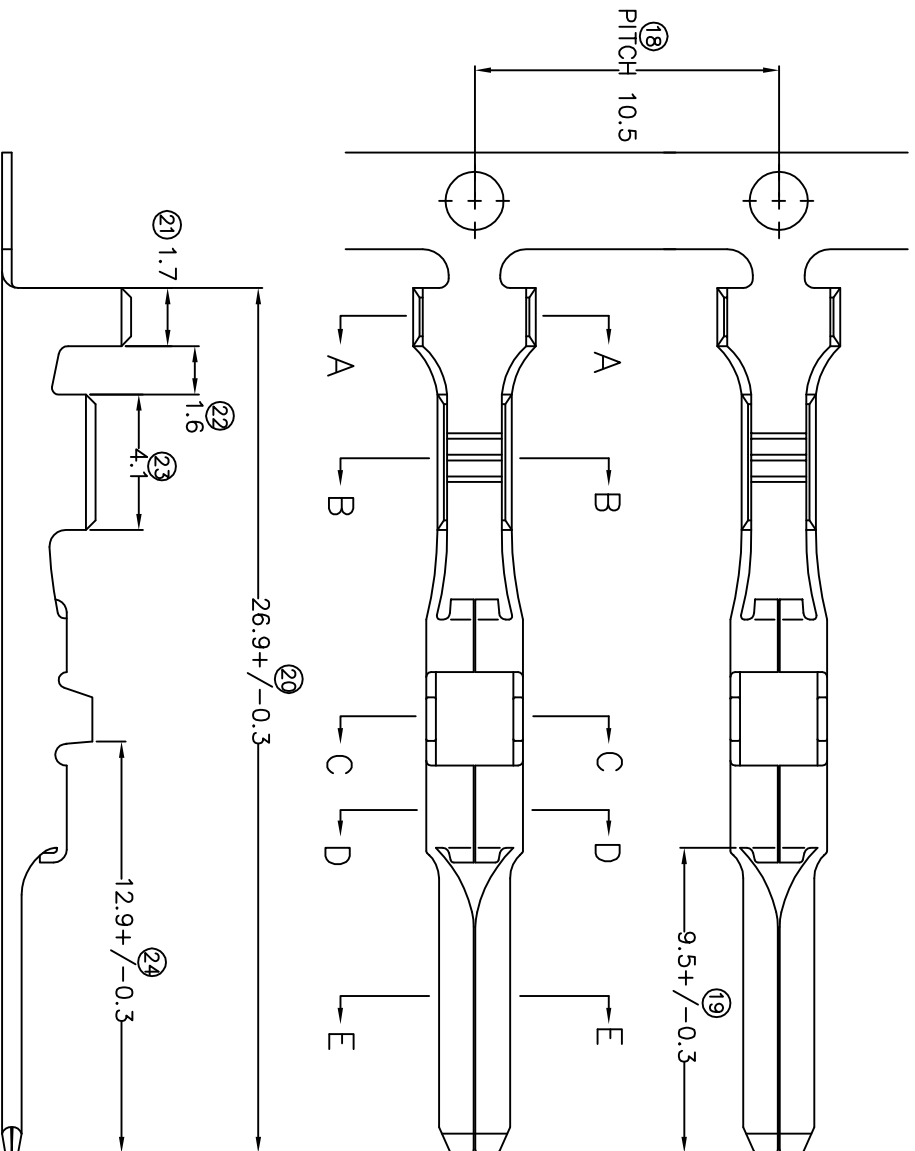

FOR REFERENCE ONLY

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TD +120°C.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 6000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 1.8MM.
- 1) APPLICABLE WIRE RANGE : 0.43-0.19MM².

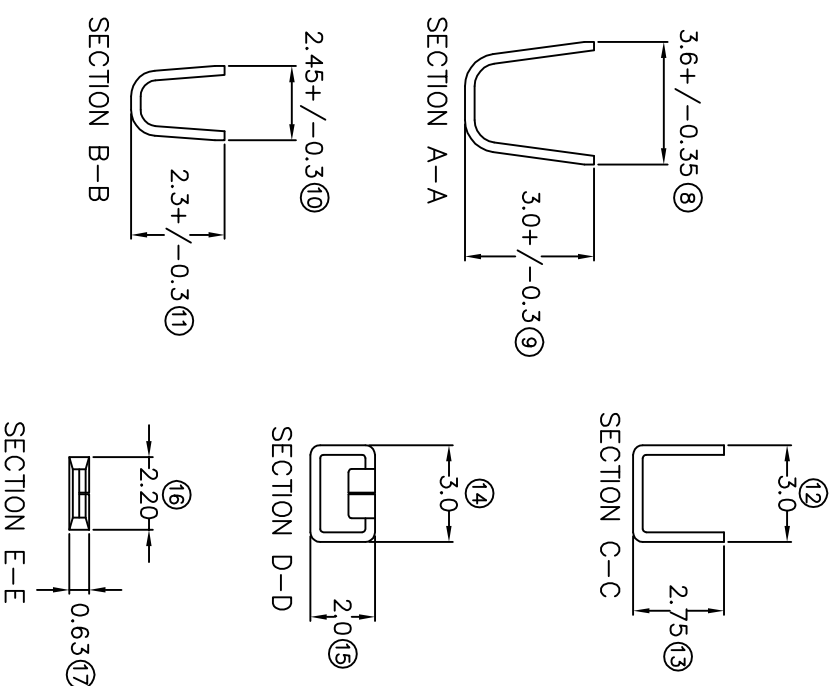

MATERIAL: 10.30 BRASS C2680		PRE-TIN PLATED TREATMENT SELECTIVE		27090S-2T PART NUMBER	
DIMENSIONS : MM		DWN: KS YEW		EPJ Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd. PART NAME: 090 SERIES TAB APPLICABLE (1) TERMINALS (2) HOUSING (1) 17090 (2) 090 SERIES HOUSING	
TOLERANCE UNLESS OTHERWISE SPECIFIED:		CHK: SC CHOO YL			
X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50		APVD: CHUANG			
REVISION: 03		SCALE : FREE DRAWING NO:			
SHEET OF : 1 / 1		EFFECTIVE DATE : 13/7/07		A1300	

SPECIFICATION :