
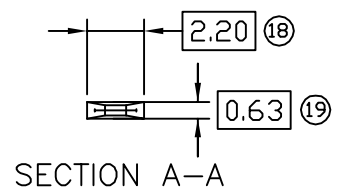
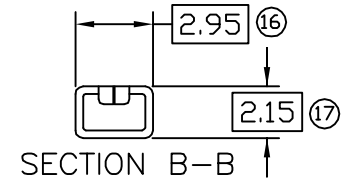
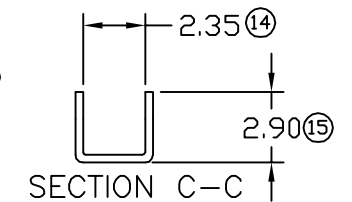
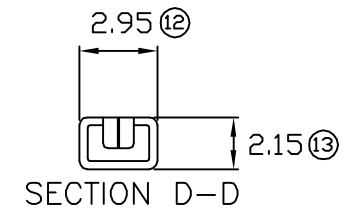

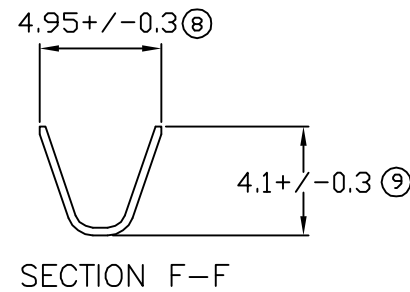
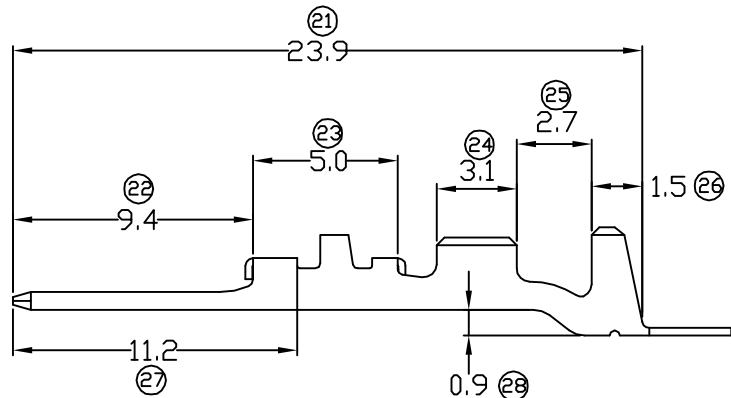


TERMINALS SPECIFICATION DRAWING

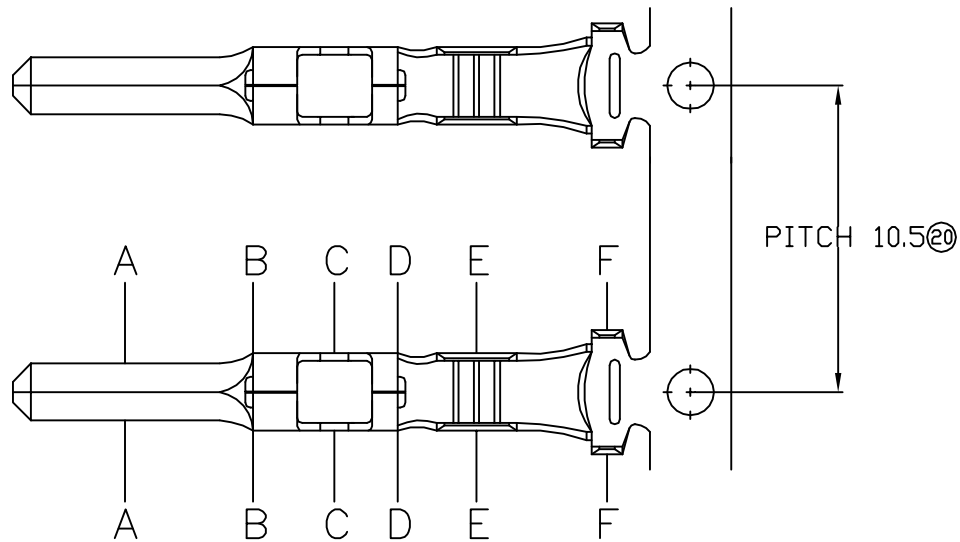

☐ MATCHING DIMENSION


- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TO $+120^{\circ}\text{C}$.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 5000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.5MM.
- 1) APPLICABLE WIRE RANGE : $0.71-0.32\text{MM}^2$.

FOR REFERENCE ONLY

SPECIFICATION :

MATERIAL:	-	-	
t0.30 BRASS	PRE-TIN PLATED	27091M-2T	
C2680	TREATMENT SELECTIVE	PART NUMBER	
DIMENSIONS : MM	PREPARE BY: KS YEW	EPI Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.	
TOLERANCE UNLESS OTHERWISE SPECIFIED:	REVIEWED BY: CH ANG		
X.XXX ± 0.05	APPROVED BY: YL CHUANG	PART NAME: 090 SERIES TAB	
X.XX ± 0.10	SCALE : FREE	APPLICABLE (1) TERMINALS (2) HOUSING	
X.X ± 0.20	DRAWING NO: A1313	(1) 170901	
X ± 0.50		(2) S9-4MSL,S90-2MSL,S90-3MSL	
EFFECTIVE DATE :			
29/3/10			

REVISION:
04



SHEET OF :
1 / 1

04	29/3/10	(14) 2.00 CHANGE TO 2.35
REV.	DATE	AMENDMENT