


TERMINALS SPECIFICATION DRAWING

UNCONTROLLED COPY

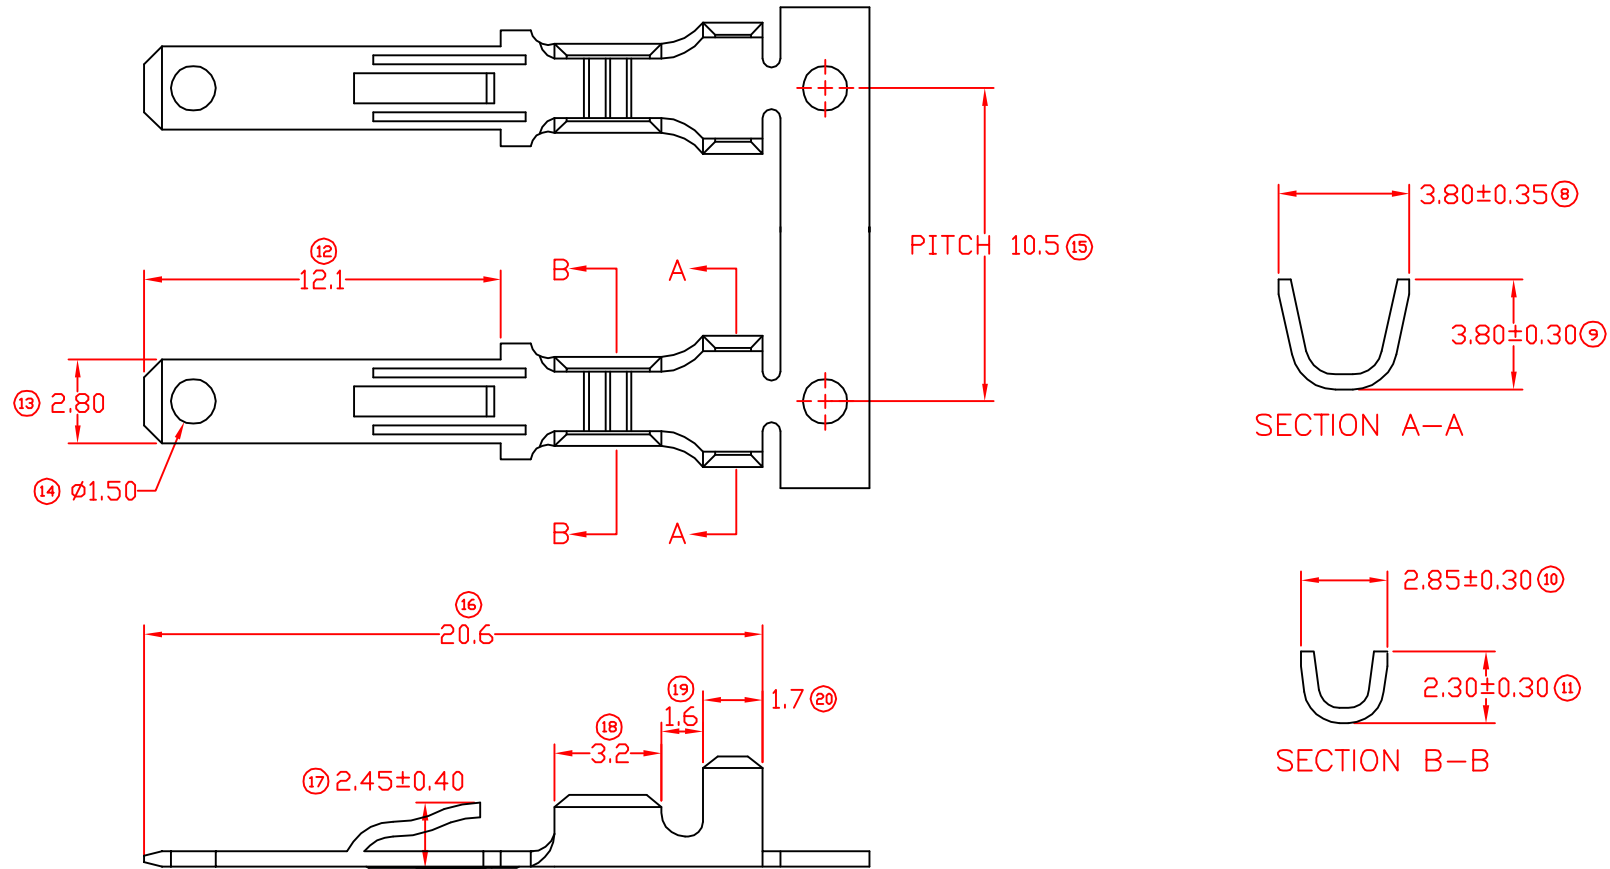

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TO $+120^{\circ}\text{C}$.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 5000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.1MM.
- 1) APPLICABLE WIRE RANGE : $0.60\sim 0.31\text{MM}^2$.

FOR REFERENCE ONLY

SPECIFICATION :

05	25/4/11	(17) 2.15 ± 0.20 CHANGE TO 2.45 ± 0.40
REV.	DATE	AMENDMENT

REVISION: 05
SHEET OF : 1 / 1

MATERIAL: t0.50 BRASS C2680	-	-
	NONE	27110S-1
	TREATMENT SELECTIVE	PART NUMBER
DIMENSIONS : MM	PREPARE BY: KS YEW	Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.
TOLERANCE UNLESS OTHERWISE SPECIFIED:	REVIEWED BY: CH ANG	
X.XXX ± 0.05 X.XX ± 0.10 X.X ± 0.20 X ± 0.50	APPROVED BY: CY CHUANG	PART NAME: 110 SERIES TAB
	SCALE : FREE	APPLICABLE (1) TERMINALS (2) HOUSING
	DRAWING NO: A1200	(1) 171101 (2) 110 SERIES HOUSING
	EFFECTIVE DATE : 25/4/11	