
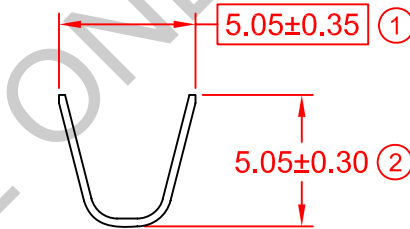
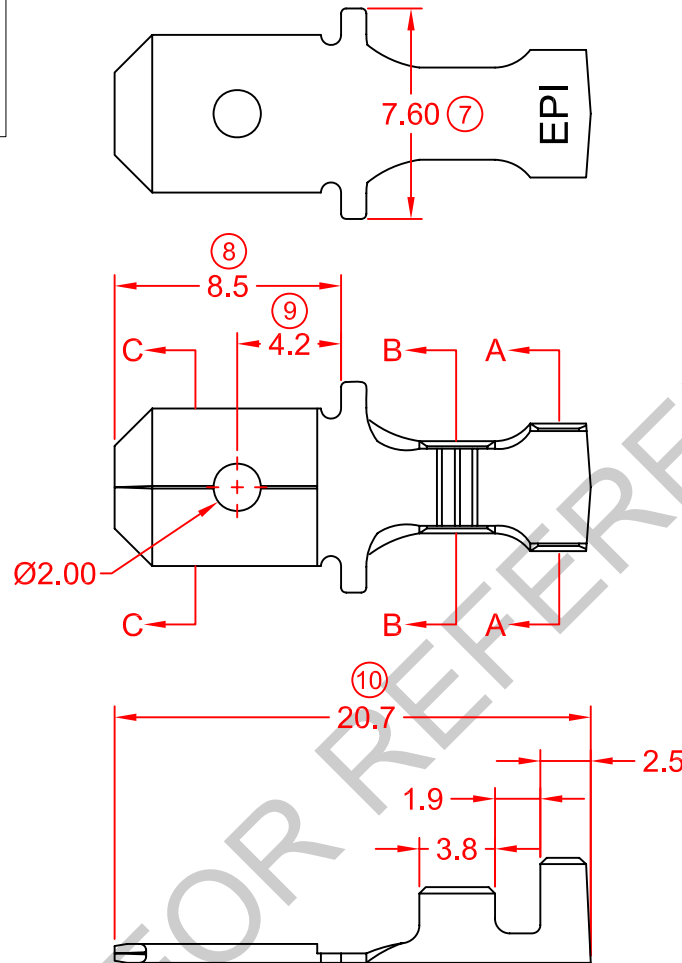


SPECIFICATION DRAWING


MASTER COPY

ITEM NO	MATERIAL	TREATMENT	QTY/REEL	REEL/CARTON	MATCHING PART(S)
272502M-1	t0.4 BRASS (C2680)	NONE	5000 PCS	4	TERMINAL-17250
272502M-2T	t0.4 BRASS (C2680)	PRE-TIN PLATED	5000 PCS	4	HOUSING-N/A


SYMBOL	DESCRIPTION
○	DIMENSION INSPECTED DURING SETUP AND OUTGOING.
□	DIMENSION INSPECTED HOURLY.
SPC	STATISTICALLY CONTROLLED DIMENSION.
△	JIG USED DURING INSPECTION.



SECTION A-A

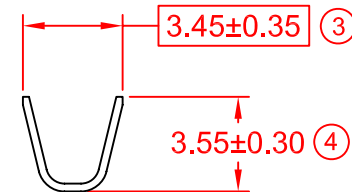

SECTION B-B

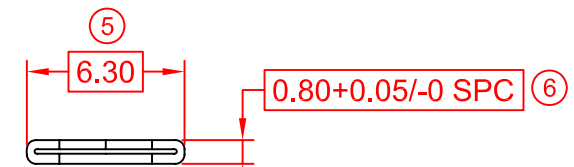

SECTION C-C

REMARKS:

- a) PLATING THICKNESS MIN 40μ INCH
- b) SUGGESTED WIRE INSULATION (O.D): 2.9MM
- c) SUGGESTED WIRE RANGE: 1.53~0.78MM² (AWG14~18)

			REVISION: 05		GENERAL TOLERANCE UNLESS SPECIFIED: X.XXX ±0.05 X.XX ±0.10 X.X ±0.20 X ±0.50	PREPARE BY: KS YEW		Elamp Precision Industry(M) Sdn.Bhd.
						REVIEWED BY: CH ANG		
					APPROVED BY: CY CHUANG		ITEM NO: 272502M-1, 2T	
05	23/12/11	UPDATE TO NEW FORMAT	-	SHEET OF: 1 / 1	EFFECTIVE DATE: 23/12/11	SCALE : FREE		DRAWING NO: EP-Q-311A
REV.	DATE	AMENDMENT	ECR NO:			UNIT : MM		