


# TERMINALS SPECIFICATION DRAWING

UNCONTROLLED COPY

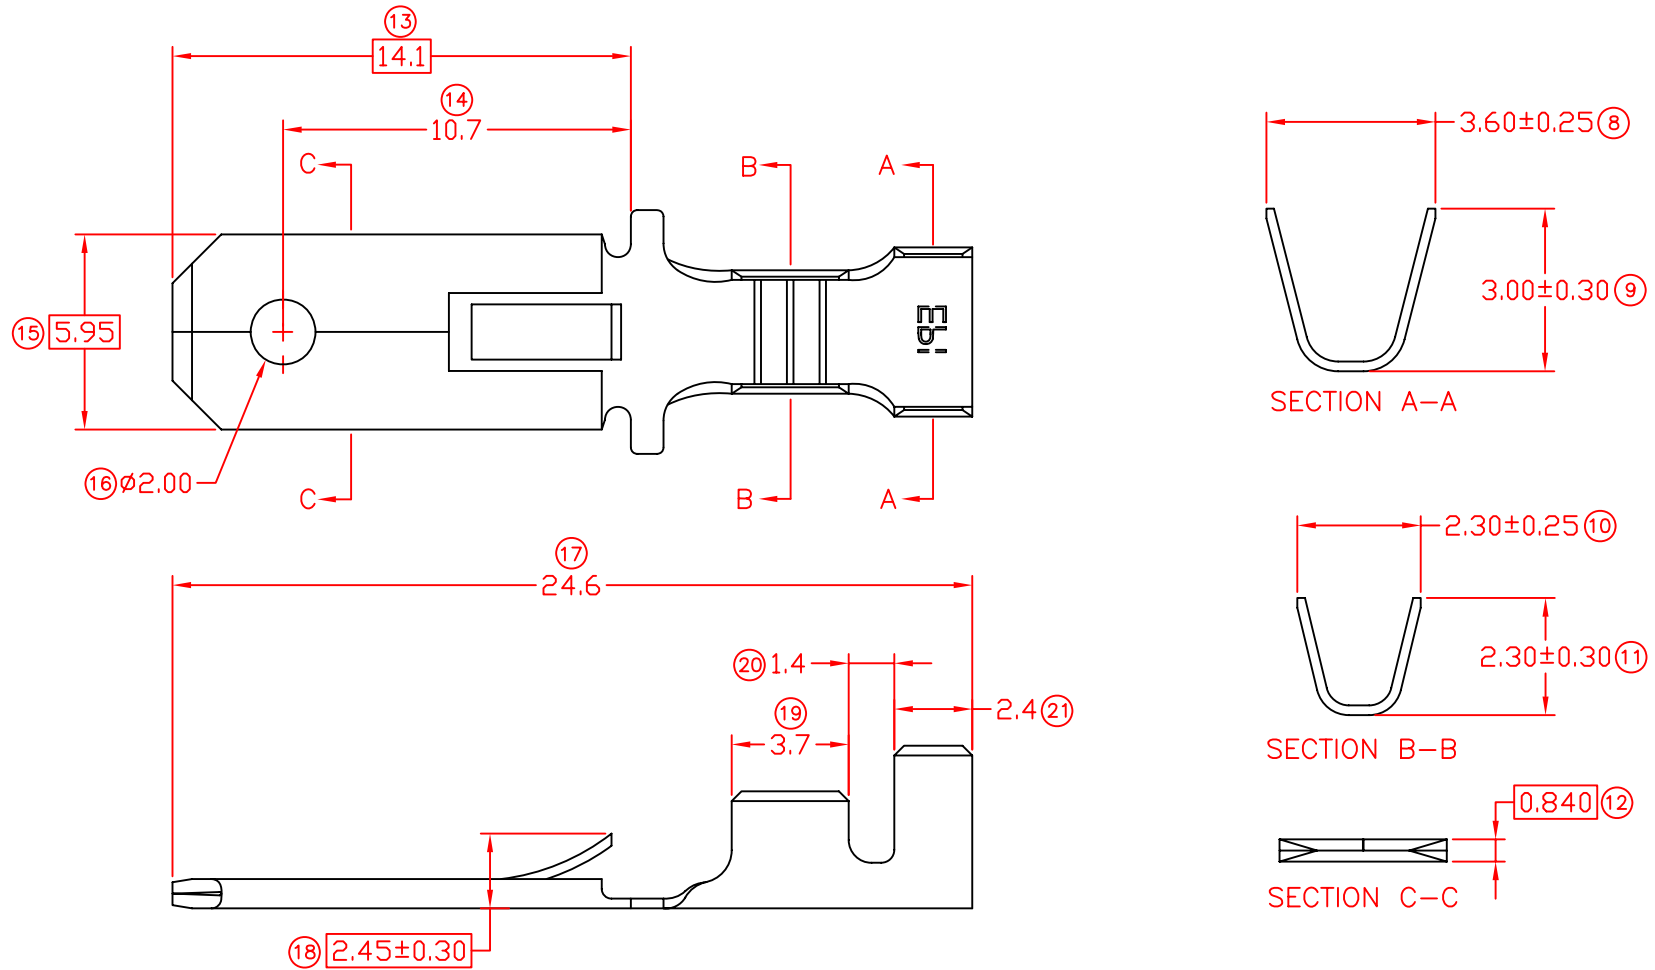

☐ MATCHING DIMENSION

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TO +120°C.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 5000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 1.7MM.
- 1) APPLICABLE WIRE RANGE : 0.54-0.28MM<sup>2</sup>.

FOR REFERENCE ONLY

MATERIAL: t0.40 BRASS C2680	PRE-TIN PLATED	272503S-2T
	NONE	272503S-1
	TREATMENT SELECTIVE	PART NUMBER
DIMENSIONS : MM  TOLERANCE UNLESS OTHERWISE SPECIFIED: X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50	PREPARE BY: KS YEW  REVIEWED BY: CH ANG  APPROVED BY: CY CHUANG  SCALE : FREE  DRAWING NO: A1318	Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.  PART NAME: 250 SERIES TAB  APPLICABLE (1) TERMINALS (2) HOUSING (1) 172503S/M/H (2) 250M SERIES

SPECIFICATION :

			REVISION: 06
06	12/11/10	⑱ 2.35±0.20 CHANGE TO 2.45±0.30	SHEET OF : 1 / 1
REV.	DATE	AMENDMENT	EFFECTIVE DATE : 12/11/10