


TERMINALS SPECIFICATION DRAWING

UNCONTROLLED COPY

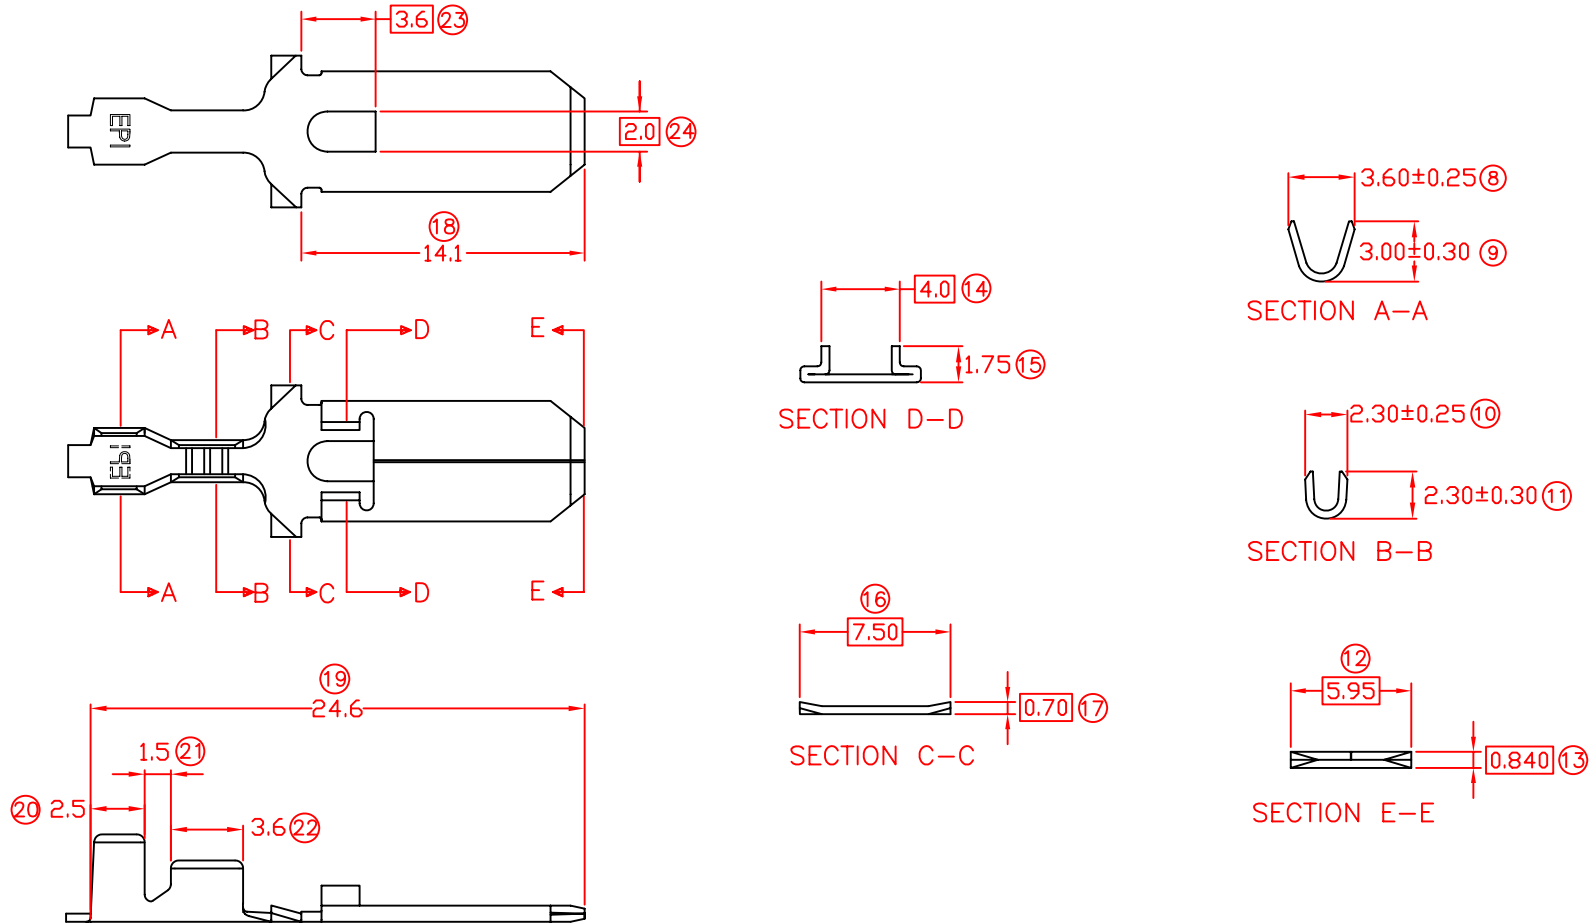

□ CRITICAL DIMENSION

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TO +120°C.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 5000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 1.7MM.
- 1) APPLICABLE WIRE RANGE : 0.55-0.28MM².

FOR REFERENCE ONLY

SPECIFICATION :

02	15/6/11	CHANGE DIM FR (14) 3.9 TO 4.0, FR (15) 1.90 TO 1.75, FR (19) 24.6±0.30 TO 24.6
01	6/11/09	ADD: (23), (24) & □, (18) 14.1±0.3 CHANGE TO 14.1
REV.	DATE	AMENDMENT

REVISION:	02
SHEET OF :	1 / 1

MATERIAL: t0.40 BRASS C2680	PRE-TIN PLATED	272505AS-2T
	NONE	272505AS-1
	TREATMENT SELECTIVE	PART NUMBER
DIMENSIONS : MM	PREPARE BY: KS YEW	Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.
TOLERANCE UNLESS OTHERWISE SPECIFIED:	REVIEWED BY: CH ANG	
X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50	APPROVED BY: CY CHUANG	PART NAME: 250 TAB IN TAB
EFFECTIVE DATE : 15/6/11	SCALE : FREE	APPLICABLE (1) TERMINALS (2) HOUSING (1) 172505S/M/H (2) 250 SERIES HOUSING WITH LOCK
	DRAWING NO: A1473	