


TERMINALS SPECIFICATION DRAWING

UNCONTROLLED COPY

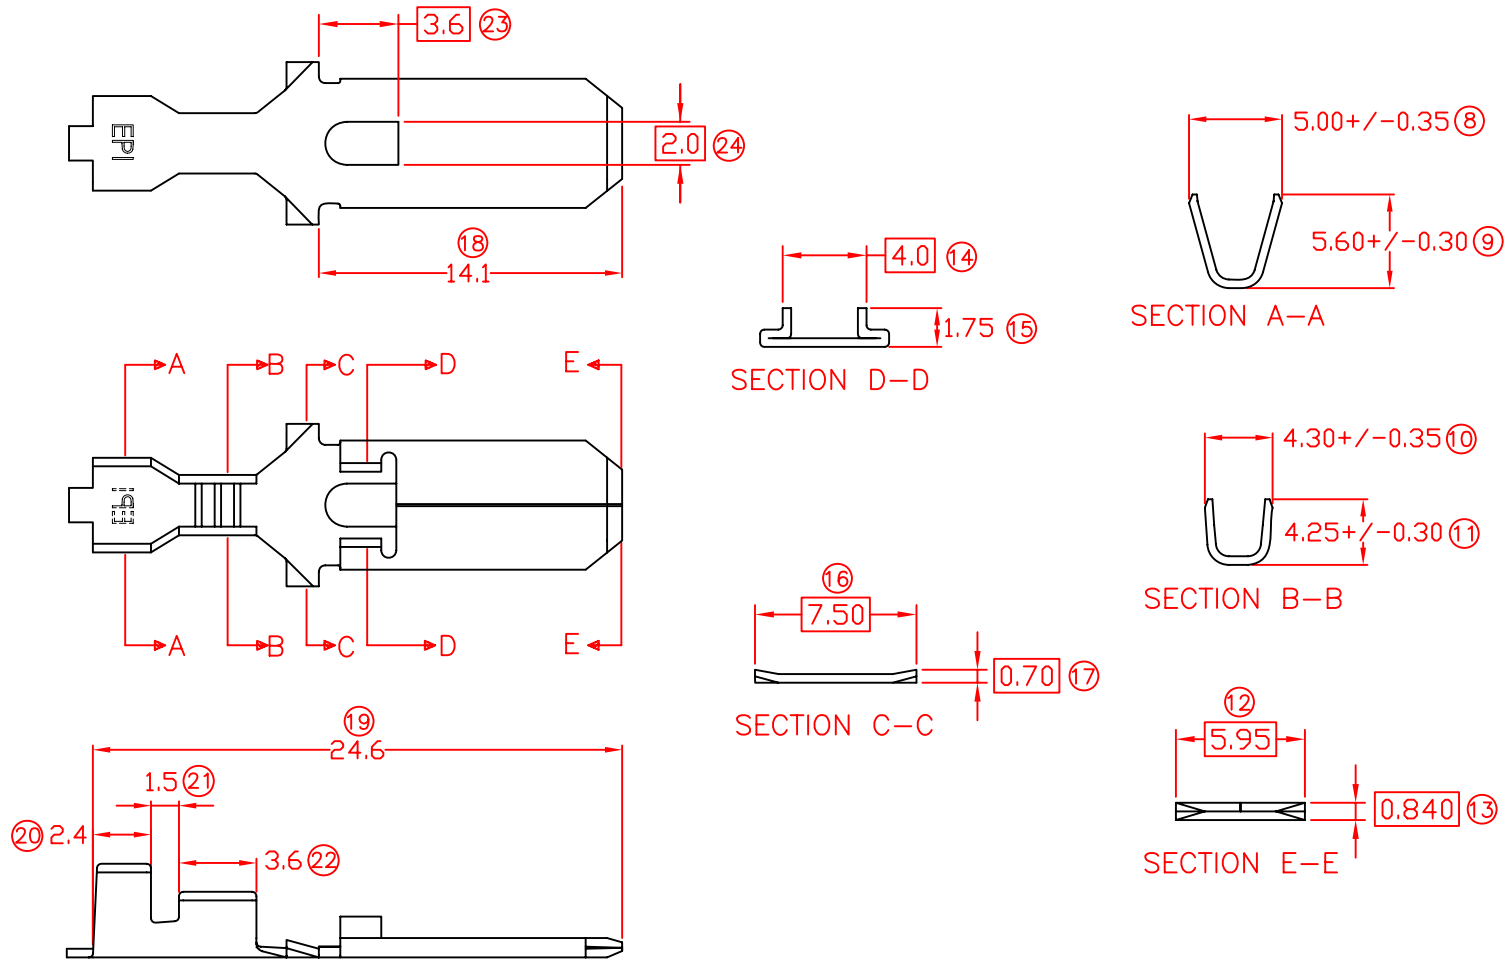

CRITICAL DIMENSION

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TO +120°C.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40µ INCH.
- 3) PACKING QTY : 3500 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 3.2MM.
- 1) APPLICABLE WIRE RANGE : 2.34-1.19MM².

FOR REFERENCE ONLY

SPECIFICATION :

REV.	DATE	AMENDMENT
08	15/6/11	CHANGE DIM FR (14) 3.9 TO 4.0, FR (15) 1.90 TO 1.75
07	6/11/09	ADD (23), (24) &

REVISION: 08	
SHEET OF : 1 / 1	

MATERIAL: t0.40 BRASS C2680	PRE-TIN PLATED	272505H-2T
	NONE	272505H-1
	TREATMENT SELECTIVE	PART NUMBER
DIMENSIONS : MM	PREPARE BY: KS YEW	EPI Terminals & Connectors
TOLERANCE UNLESS OTHERWISE SPECIFIED: X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50	REVIEWED BY: CH ANG	Elamp Precision Industry(M) Sdn.Bhd.
	APPROVED BY: CY CHUANG	PART NAME: 250 TAB IN TAB
	SCALE : FREE	APPLICABLE (1) TERMINALS (2) HOUSING (1) 172505S/M/H (2) 250 SERIES HOUSING WITH LOCK
EFFECTIVE DATE : 15/6/11	DRAWING NO: A1207	