


# TERMINALS SPECIFICATION DRAWING

UNCONTROLLED COPY

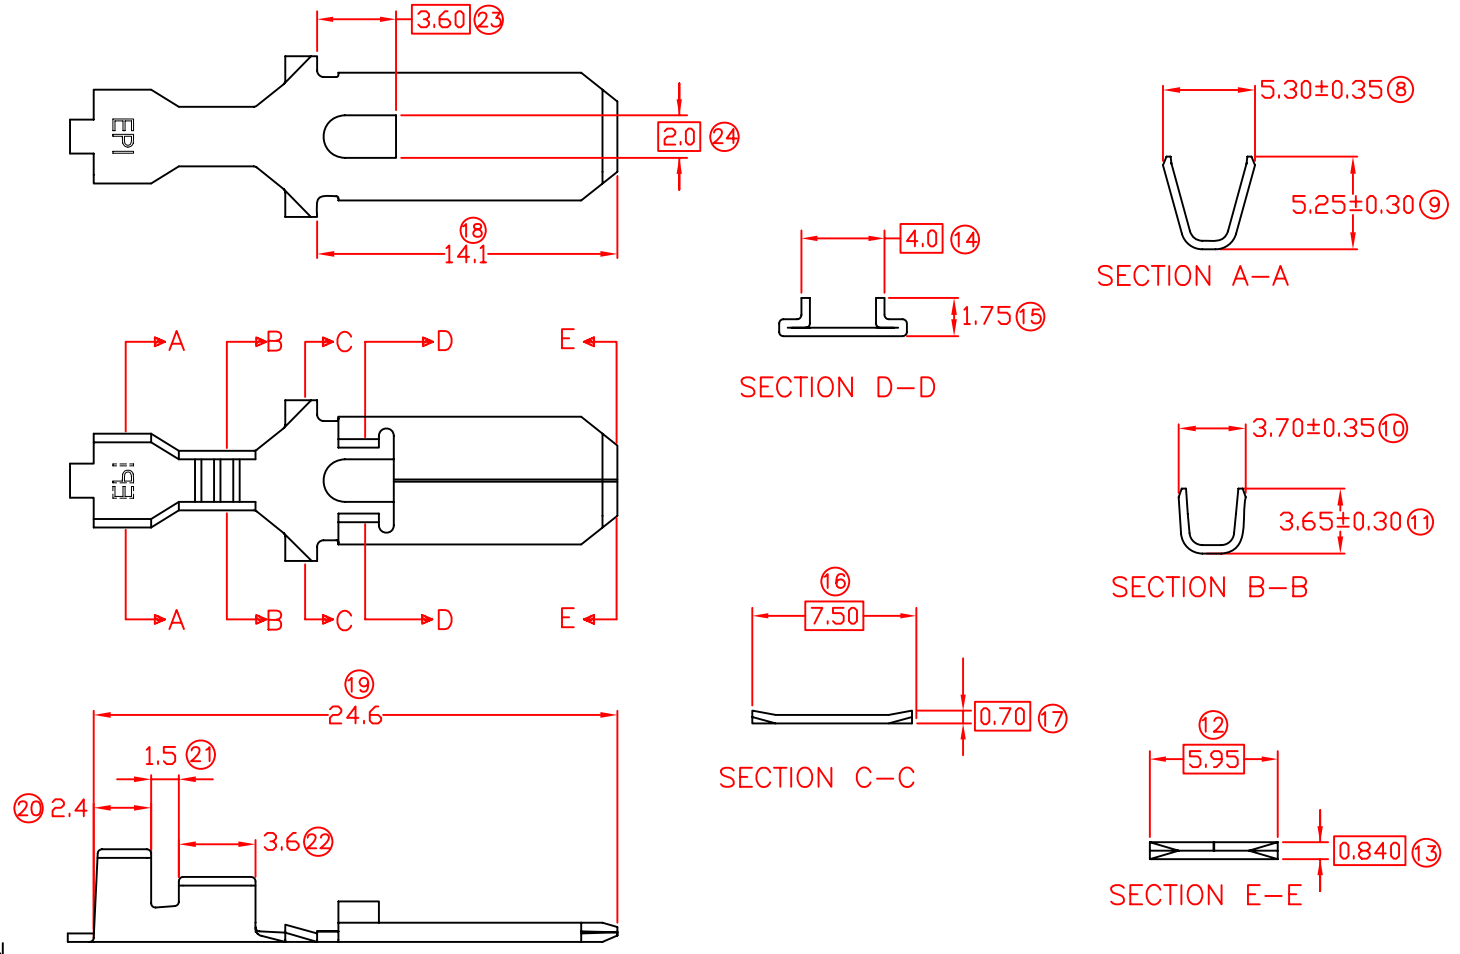

  CRITICAL DIMENSION

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40°C TO +120°C.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : 4000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 3.0MM.
- 1) APPLICABLE WIRE RANGE : 1.63-0.83MM².

**FOR REFERENCE ONLY**

SPECIFICATION :

REV.	DATE	AMENDMENT
07	15/6/11	CHANGE DIM FR (14) 3.9 TO 4.0, FR (15) 1.90 TO 1.75
06	5/11/09	ADD NO: (23), (24) & <span style="border: 1px solid black; padding: 2px;"> </span>

REVISION: 07
SHEET OF: 1 / 1

MATERIAL: t0.40 BRASS C2680	PRE-TIN PLATED	272505M-2T
	NONE	272505M-1
	TREATMENT SELECTIVE	PART NUMBER
DIMENSIONS : MM	PREPARE BY: KS YEW	<b>Terminals &amp; Connectors</b> Elamp Precision Industry(M) Sdn.Bhd.
TOLERANCE UNLESS OTHERWISE SPECIFIED: X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50	REVIEWED BY: CH ANG	
EFFECTIVE DATE : 15/6/11	APPROVED BY: CY CHUANG	PART NAME: 250 TAB IN TAB
	SCALE : FREE	APPLICABLE (1) TERMINALS (2) HOUSING (1) 172505S/M/H (2) 250 SERIES HOUSING WITH LOCK
	DRAWING NO: A1206	