
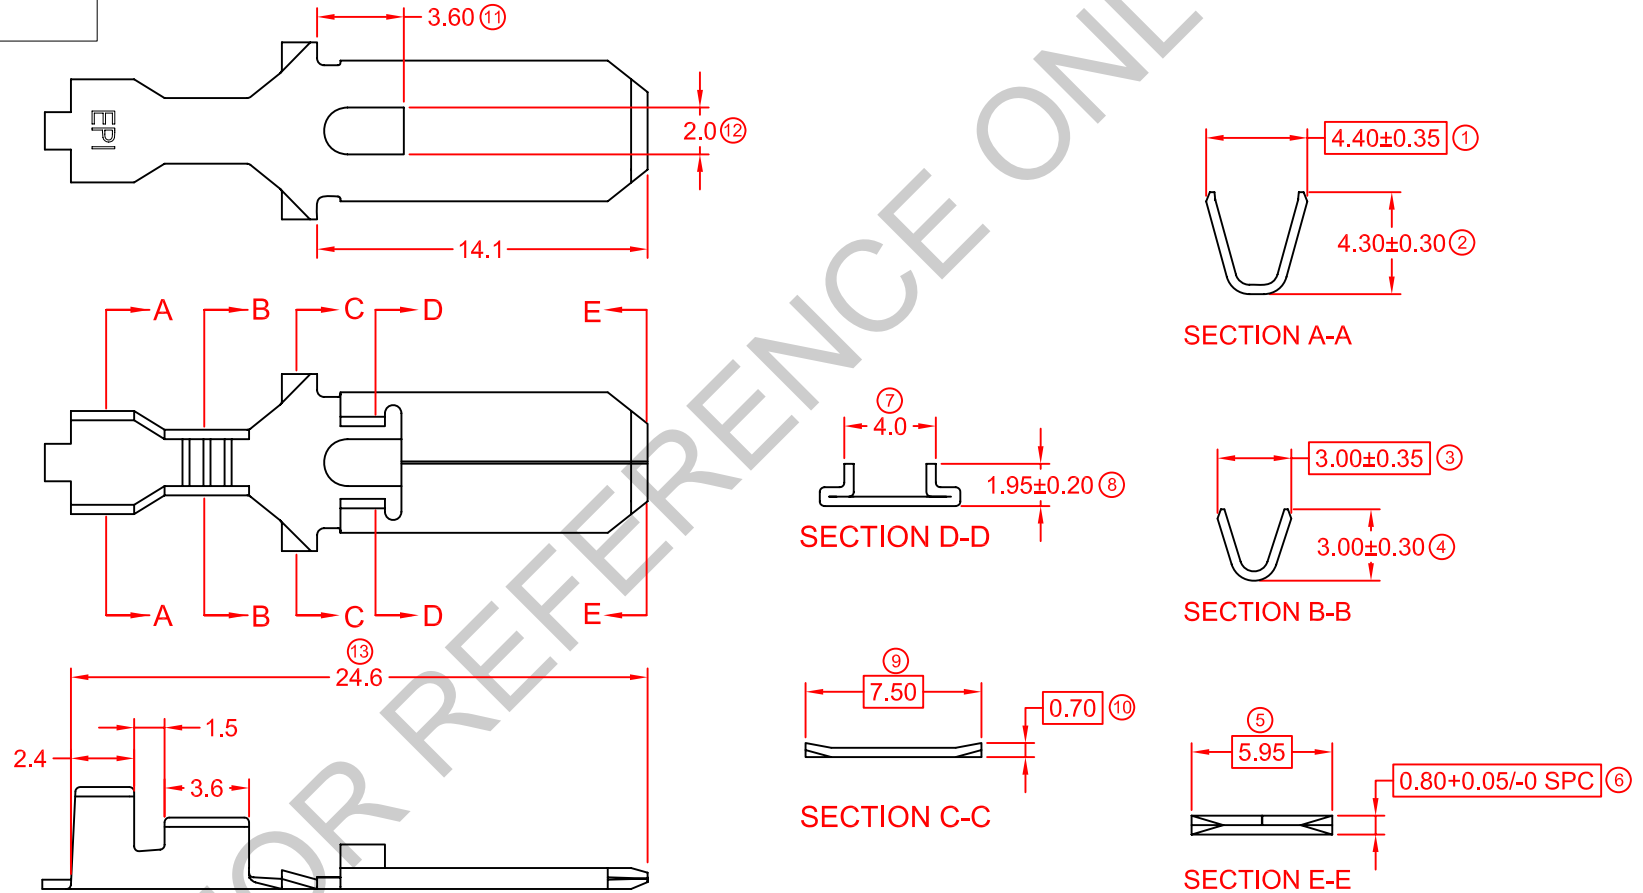


SPECIFICATION DRAWING

MASTER COPY

ITEM NO	MATERIAL	TREATMENT	QTY/REEL	REEL/CARTON	MATCHING PART(S)
272505S-1	t0.4 BRASS (C2680)	NONE	5000 PCS	4	TERMINAL-172505
272505S-2T	t0.4 BRASS (C2680)	PRE-TIN PLATED	5000 PCS	4	HOUSING-250 SERIES HOUSING WITH LOCK

SYMBOL	DESCRIPTION
○	DIMENSION INSPECTED DURING SETUP AND OUTGOING.
□	DIMENSION INSPECTED HOURLY.
SPC	STATISTICALLY CONTROLLED DIMENSION.
△	JIG USED DURING INSPECTION.

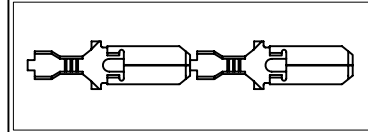

REMARKS:

- a) PLATING THICKNESS MIN 40μ INCH
- b) SUGGESTED WIRE INSULATION (O.D): 2.4MM
- c) SUGGESTED WIRE RANGE: 1.00-0.51MM² (AWG16-18)

					GENERAL TOLERANCE UNLESS SPECIFIED: X.XXX ±0.05 X.XX ±0.10 X.X ±0.20 X ±0.50	PREPARE BY: KS YEW	Elamp Precision Industry(M) Sdn.Bhd.
				REVISION: 09		REVIEWED BY: CH ANG	
						APPROVED BY: CY CHUANG	ITEM NO: 272505S-1, 2T
09	11/1/12	UPDATE TO NEW FORMAT	-	SHEET OF: 1 / 1	EFFECTIVE DATE: 11/1/12	SCALE : FREE UNIT : MM	DRAWING NO: EP-Q-203A
REV.	DATE	AMENDMENT	ECR NO:				