


# TERMINALS SPECIFICATION DRAWING

UNCONTROLLED COPY

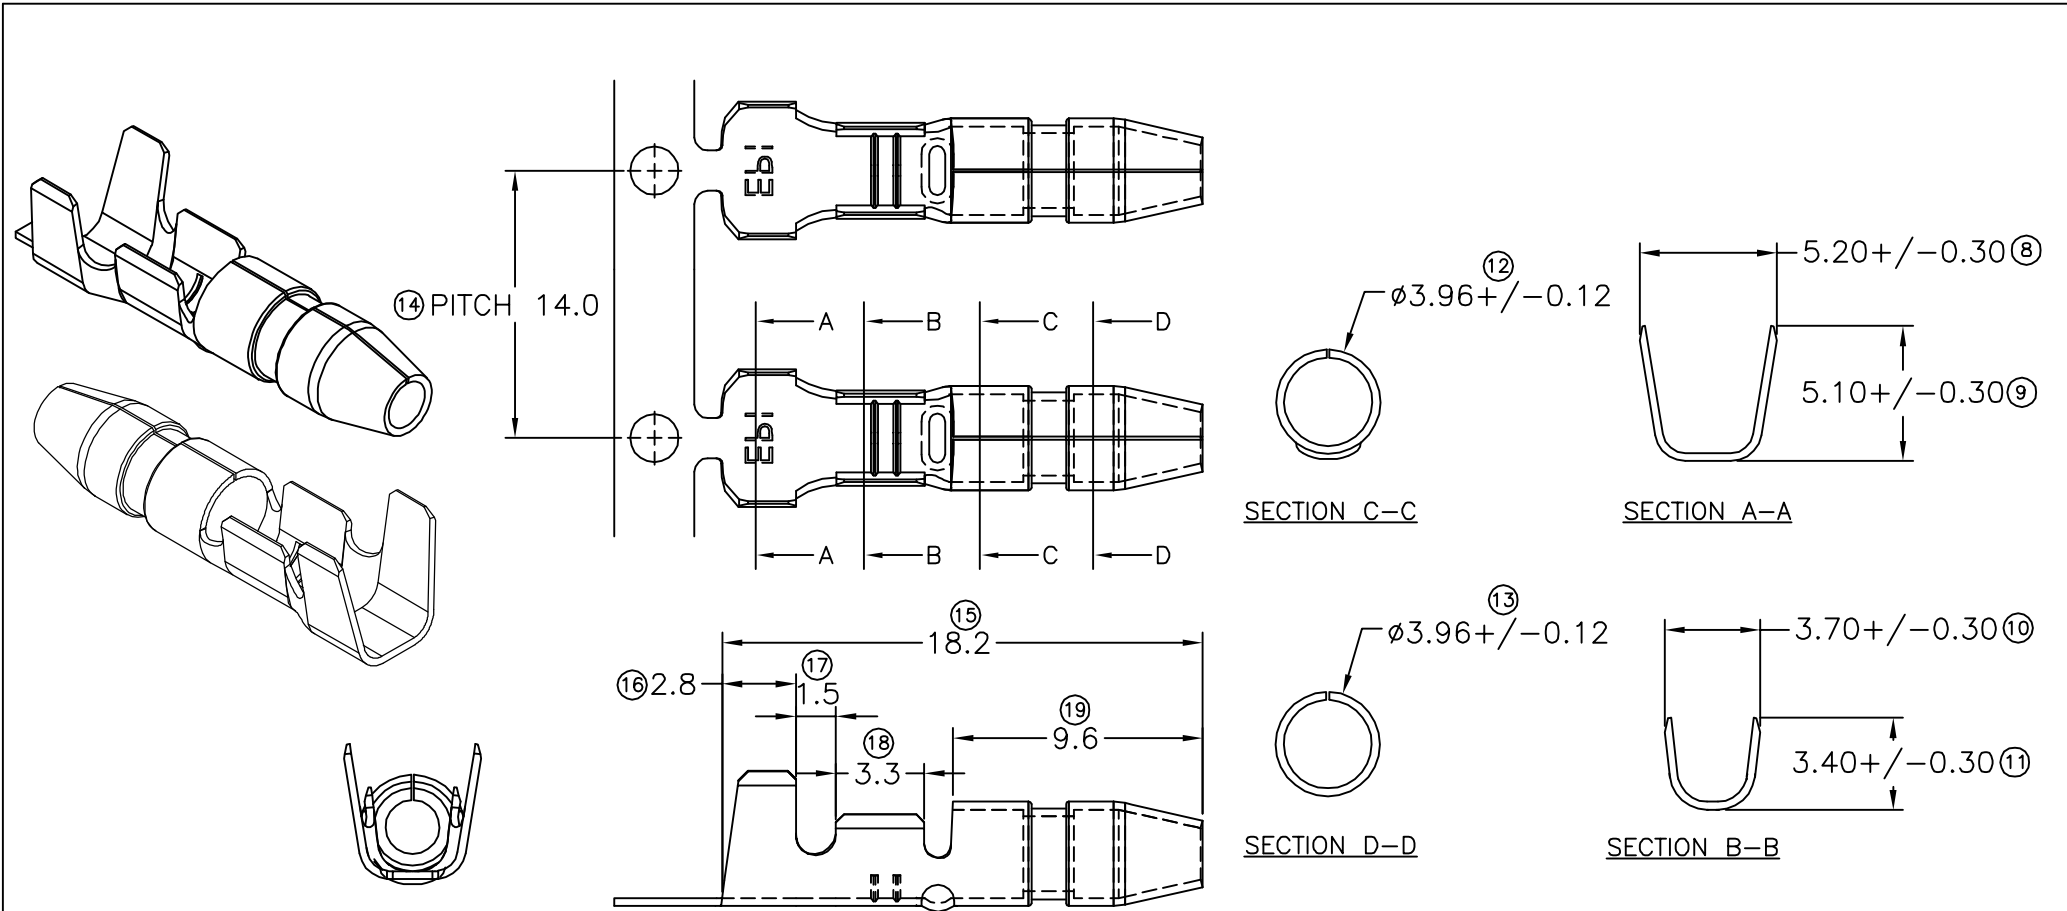

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40° TO +120°.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : - PCS/REEL.
- 2) WIRE INSULATION (O.D) :3.1MM.
- 1) APPLICABLE WIRE RANGE : 1.20~0.53MM<sup>2</sup>.

SPECIFICATION :

**FOR REFERENCE ONLY**

MATERIAL: t0.30 BRASS C2680	TIN PLATING	28051-2
	NONE	28051-1
	TREATMENT SELECTIVE	PART NUMBER
DIMENSIONS : MM  TOLERANCE UNLESS OTHERWISE SPECIFIED: X.XXX +/-0.05 X.XX +/-0.10 X.X +/-0.20 X +/-0.50	DWN: KS YEW CHK: C.Y CHUANG Y.L APVD: CHUANG  SCALE : FREE DRAWING NO: A1532	<b>EPI</b> Terminals & Connectors Elamp Precision Industry(M) Sdn.Bhd.  PART NAME: φ5.0MM BULLET TERMINALS APPLICABLE (1) TERMINALS (2) HOUSING (1) 18051 (2) -
REVISION: TEMP  	SHEET OF : 1 / 1	EFFECTIVE DATE : 23/10/08

TEMP	23/10/08	NEW RELEASE
REV.	DATE	AMENDMENT