


TERMINALS SPECIFICATION DRAWING

UNCONTROLLED COPY

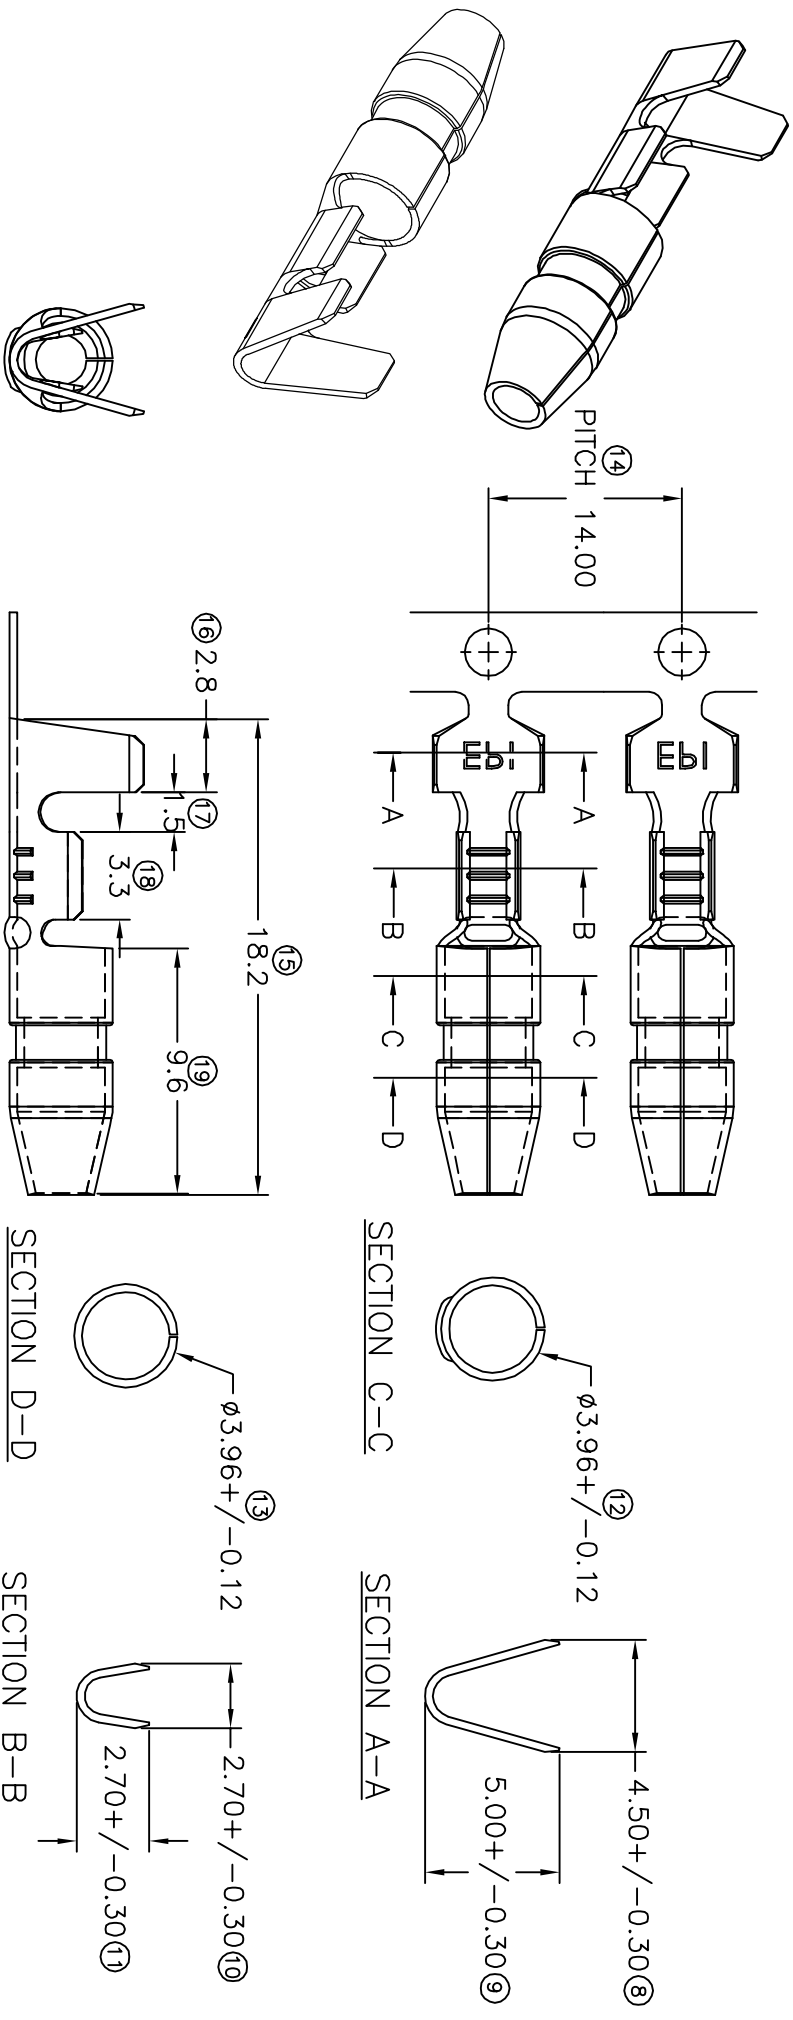

- 7) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 6) TEMPERATURE RANGE -40° TO +120°.
- 5) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 4) THICKNESS PLATING MORE THAN 40μ INCH.
- 3) PACKING QTY : - PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.7MM.
- 1) APPLICABLE WIRE RANGE : 0.57~0.26MM².

SPECIFICATION :

FOR REFERENCE ONLY

REVISION:		TOLERANCE UNLESS OTHERWISE SPECIFIED:		DWN: KS YEW		TIN PLATING	
TEMP		OTHERWISE SPECIFIED:		CHK:CY CHUANG		NONE	
REV.		X.XXX +/-0.05		APVD: Y.L		TREATMENT SELECTIVE	
DATE		X.XX +/-0.10		SCALE : FREE		PART NUMBER	
NEW RELEASE		X.X +/-0.20		DRAWING NO:		PART NAME:	
AMENDMENT		X +/-0.50		A1524		Eiamp Precision Industry(M) Sdn.Bhd.	
SHEET OF : 1 / 1		EFFECTIVE DATE : 22/10/08				APPLICABLE (1) TERMINALS (2) HOUSING	
						(1) 18051	
						(2) -	