
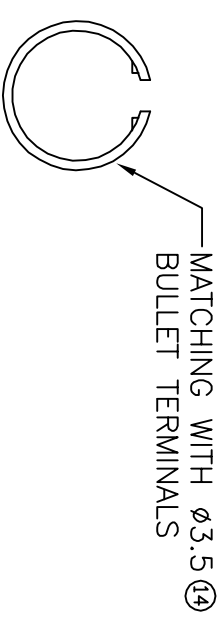
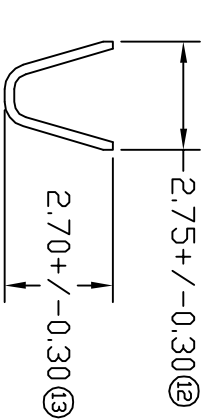
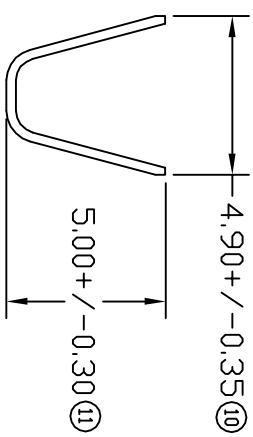
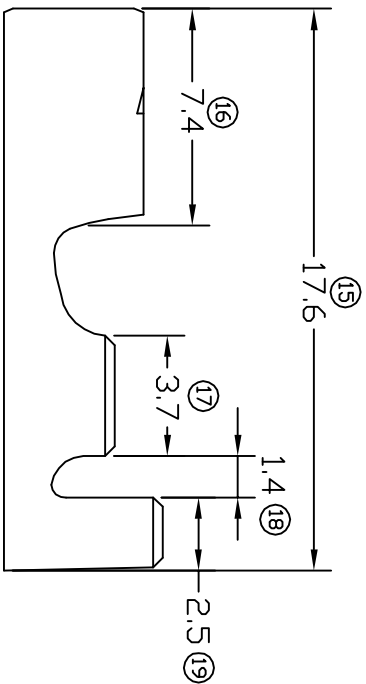


TERMINALS SPECIFICATION DRAWING

UNCONTROLLED COPY

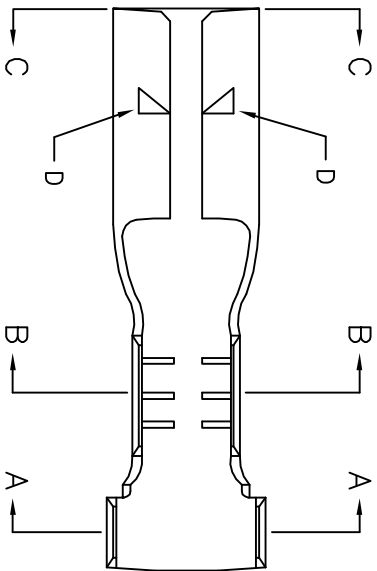

- 9) CRIMPING WIRE TENSILE FORCE IS BASE ON COPPER BREAK OFF INTENSITY.
- 8) TEMPERATURE RANGE -40°C TO +120°C.
- 7) VOLTAGE-MAX [VOLTS] PER WIRE SPECIFICATION.
- 6) TENSILE FORCE : MIN 2.00KG.
- 5) INSERT FORCE : MAX 3.30KG.
- 4) THICKNESS PLATING MORE THAN 40µ INCH.
- 3) PACKING QTY : 8000 PCS/REEL.
- 2) WIRE INSULATION (O.D) : 2.8MM.
- 1) APPLICABLE WIRE RANGE : 0.63-0.28MM².

SPECIFICATION :

FOR REFERENCE ONLY

REVISION	REASON OF CHANGE	REVISION:	
NO	DATE	00	
00	30/3/09	1ST ISSUE	
		SHEET OF :	1 / 1

MATERIAL:	TIN PLATING	P18041AS-2
to.35 BRASS	NONE	P18041AS-1
C2680	TREATMENT SELECTIVE	PART NUMBER
DIMENSIONS : MM	DWN: KS YEW	
TOLERANCE UNLESS OTHERWISE SPECIFIED:	CHK: C Y	
X.XXX +/-0.05	CHK: CHUANG	
X.XX +/-0.10	Y L	
X.X +/-0.20	APVD: CHUANG	
X +/-0.50	SCALE : FREE	
EFFECTIVE DATE :	DRAWING NO:	
30/3/09	A1298	
PART NAME:		
Eiamp Precision Industry(M) Sdn.Bhd.		
4.0MM DIA. BULLET TERMINALS		
APPLICABLE (1) TERMINALS (2) HOUSING		
(1) 28041AS		
(2) -		